



TORQUE HINGE A

15-7-3583

Provides torque stability in both directions.

For pair using: please use the same torque in both hinges.


When installing, ensure that both hinge axis are aligned.

Cycle life: 20,000 cycles.


Operating temperature: 0°C - 40°C.

For horizontal applications.




A (length)	80 mm
Note	Type 2
Material	430 stainless steel
Weight (g)	65 g
Torque	4.5 N.m
B (width)	18.5 mm
C	2 mm
Finish	polished
Nouvelle référence	NEW

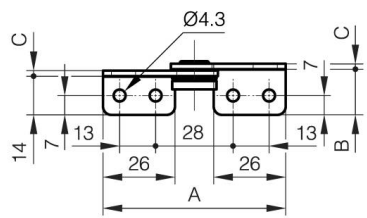


Type 2



Type 1

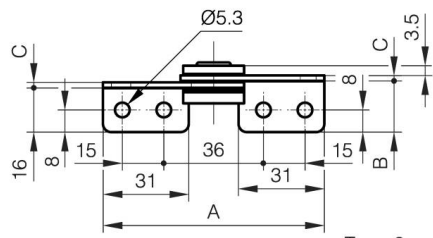

Type 2



Type 1

