

Soft closing recessed hook

Model : 22-7-3549



Hook is spring loaded to retract with a soft closing mechanism.

Can be mounted on wood or sheet metal.

Installation on sheet metal: use bracket 22-7-3551.

Installation on wooden panel: please take off the cushion rubber.


Panel Thickness:

Wood: Min. 20 mm.

Sheet Metal: 0.8 to 4.0 mm.

Load capacity: 300 N max.

Material: aluminium, POM, pin in stainless steel.

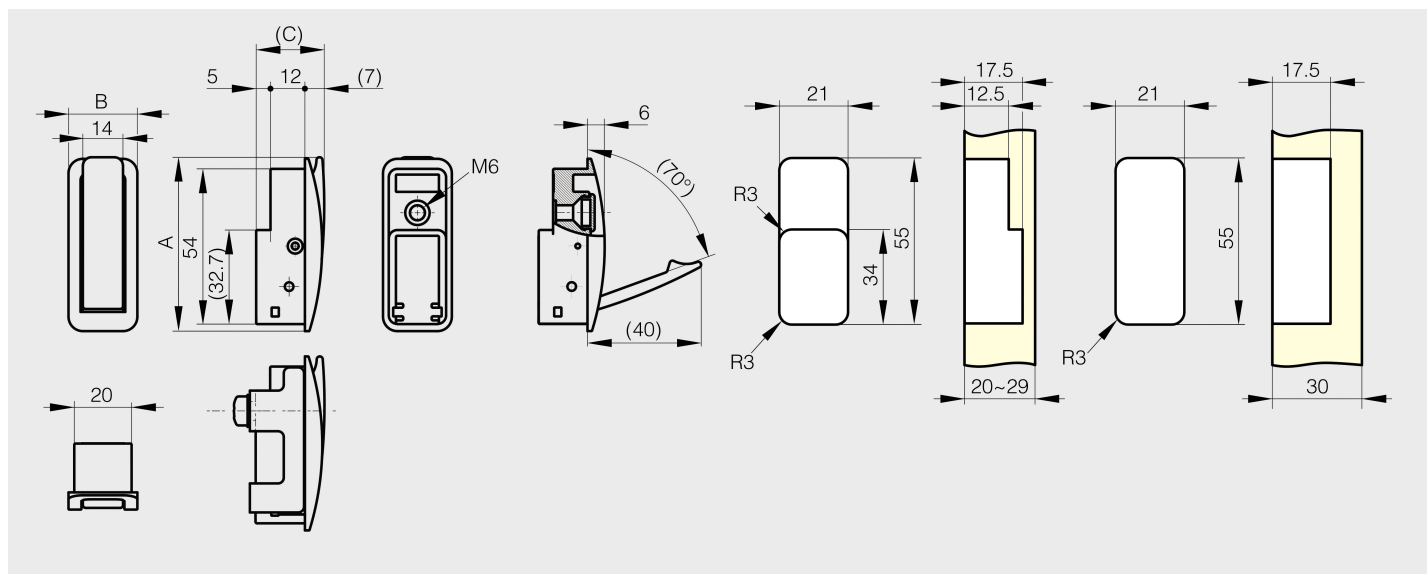

Material	aluminium
Finish	dark grey
A (length)	60
B (width)	24
C	24
Weight (g)	49
Material	aluminium