

## Soft closing recessed hook

Model : 22-7-3550



Hook is spring loaded to retract with a soft closing mechanism.

Can be mounted on wood or sheet metal.

Installation on sheet metal: use bracket 22-7-3551.

Installation on wooden panel: please take off the cushion rubber.


Panel Thickness:

Wood: Min. 20 mm.

Sheet Metal: 0.8 to 4.0 mm.

Load capacity: 300 N max.

Material: aluminium, POM, pin in stainless steel.

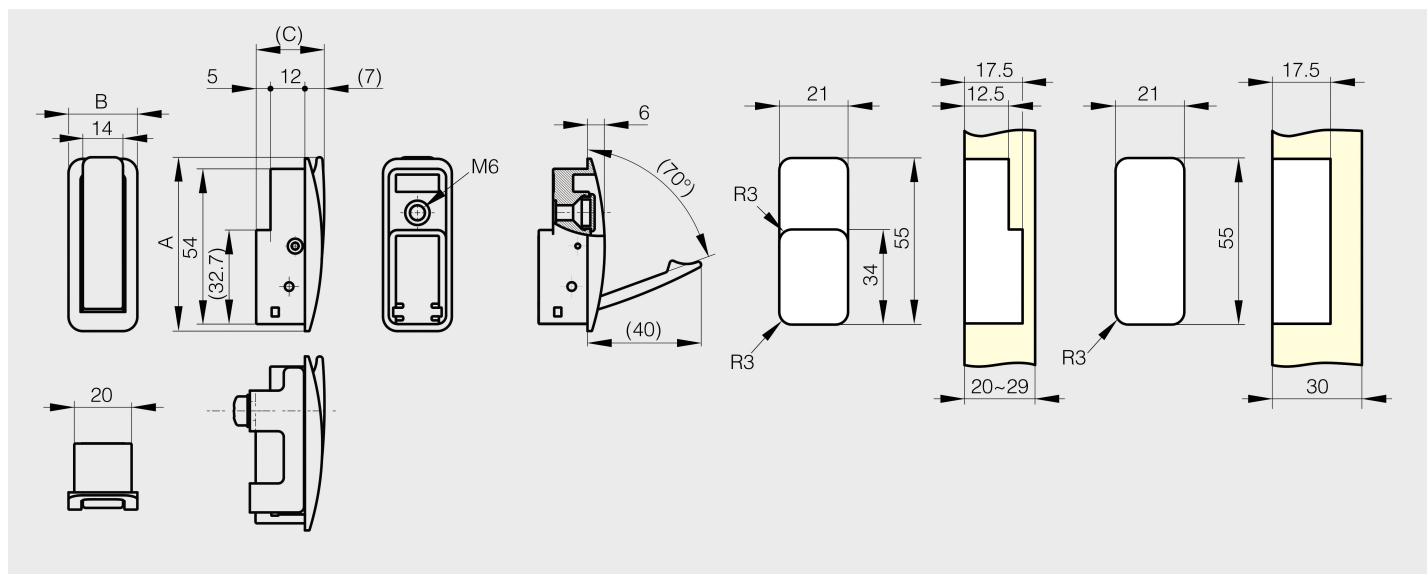

|            |           |
|------------|-----------|
| Material   | aluminium |
| Finish     | silver    |
| A (length) | 60        |
| B (width)  | 24        |
| C          | 24        |
| Weight (g) | 49        |
| Material   | aluminium |