



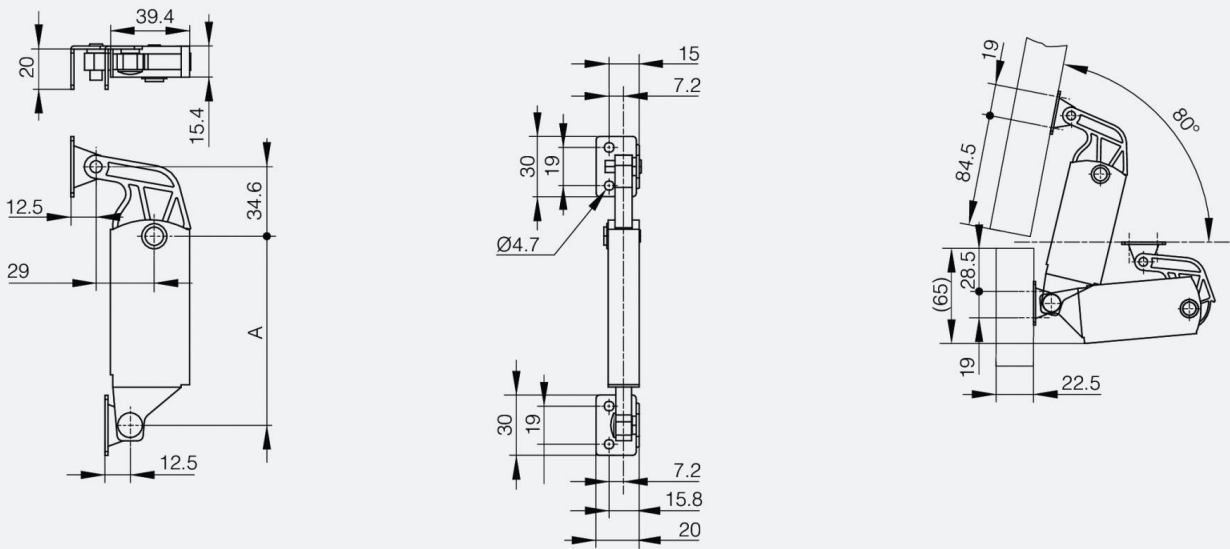
HEAVY DUTY SPRING LOADED STAY

24-7-3579

- Spring mechanism assists in lifting door and holds in open position (10° to 80°).
- Can be installed individually or in pairs.
- Non-handed: can be installed on left or right side.
- Torque calculation:

Torque (N. Produced mainly in stainless steel, for a complete description of the materials contact us.

Material	430 stainless steel
-----------------	---------------------

Finish	raw
Weight (g)	195 g
Torque	8.8 - 11.8 N.m N.m
	
A (length)	94.2 mm