



The Jack Nut® is a flat head slotted body blind rivet nut designed to be installed in soft or brittle materials such as plastic, paper, or glass. Its 4 legs expand behind the parent material providing excellent pull out resistance especially in soft materials. The Jack Nut® can be coated with RAINITITE® to seal moisture and hard plastic PVC to prevent scratching and galvanic corrosion. Jack Nut® inserts are RoHS compliant.

Installation Method

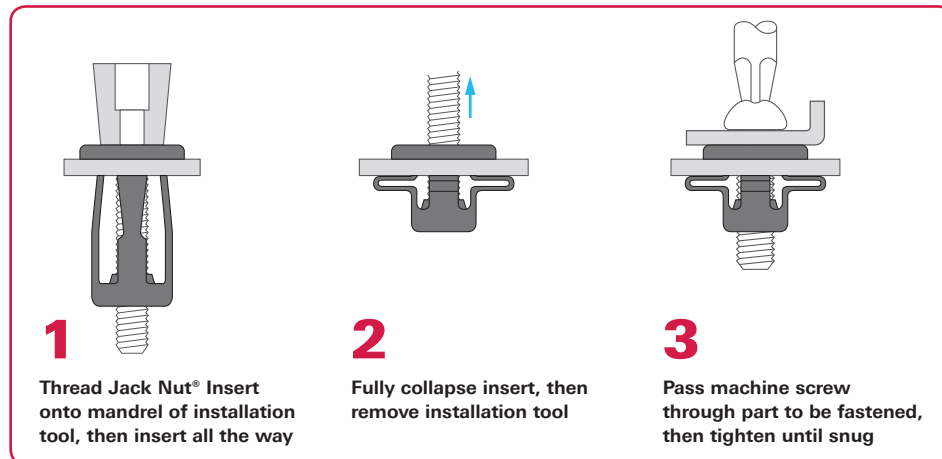

Jack Nut® Coding Guide

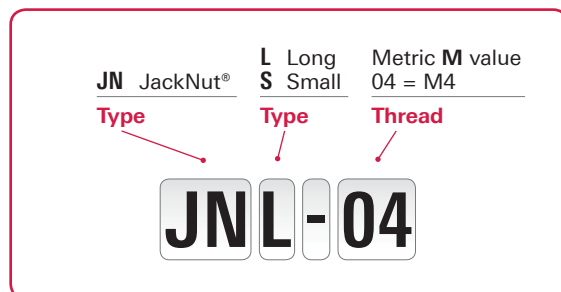

- Ideal for use in thin, soft or brittle application materials

			DESCRIPTION					BULK PACK		SMALL PACK		
								ARTICLE	BOX QTY	ARTICLE	BOX QTY	
	mm	mm		mm	mm	mm	mm					kg
M4	16.5	0.4 - 4.8	JNS-04	8.4	11.9	1.9	7.8	61910	6,500	62856	100	1.8
	22.9	4.8 - 9.5	JNL-04	8.4	12.2	1.9	7.8	61940	5,200	61945	100	2.0
M5	17.9	0.4 - 4.8	JNS-05	10.1	13.5	1.9	9.6	61912	4,500	62860	100	2.7
	23.5	4.8 - 9.5	JNL-05	10.1	13.9	1.9	9.6	61941	3,500	61942	100	2.9
M6	18.2	0.4 - 4.8	JNS-06	11.4	15.9	1.9	11.1	61914	3,200	62864	100	3.6
	23.0	4.8 - 9.5	JNL-06	11.4	15.9	1.9	11.1	61915	2,500	62862	100	4.1

M=Thread Size; *l*=Nominal Body Length; *g*=Grip Range (Min - Max); *d_h*=Hole Size; *d_k*=Nominal Head Diameter; *k*=Nominal Head Thickness; *d*=Nominal Barrel Diameter