




Stainless steel [A2]
Polished



MASTERGRIP | Hex-T open end | reduced countersunk head

Ø d		l [+0,5/-0]		Item nr.	Ø dk [+0/-0,6]	k ≤	SW [+0/-0,2]			
[mm]		[mm]	[mm]		[mm]	[mm]	[mm]	[Nm]	[N]	[N]
M4	!	12,5	0,5-3,0	24H04KVO1	7,0	0,9	6,0	12,0	8.240	2.950
 SW1 6,1										
M5	=	14,0	0,5-3,0	24H05KVO1	8,0	0,9	7,0	12,0	11.760	2.950
 SW1 7,1										
M6	=	16,0	0,5-3,0	24H06KVO1	10,0	0,9	9,0	21,0	21.560	3.820
 SW1 9,1										
M8	=	17,0	0,5-3,0	24H08KVO1	12,0	0,9	11,0	30,0	24.500	3.920
 SW1 11,1										
M10	=	20,5	0,8-4,0	24H10KVO1	14,5	1,1	13,0	40,0	47.040	5.010
 SW1 13,1										

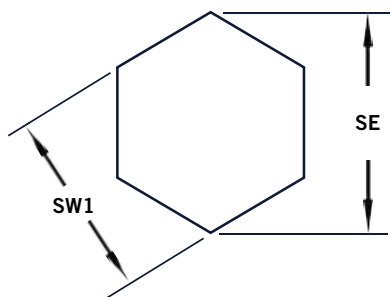

SW: Rivet nut exterior measurement flat side to flat side.
SW1: Hole interior measurement flat side to flat side.
SE: Hole interior measurement corner to corner.(not listed)

=	identical to old program
!	improved technical data
*	addition