

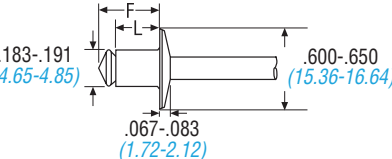
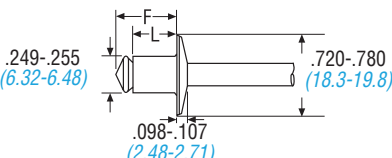
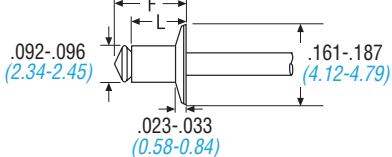
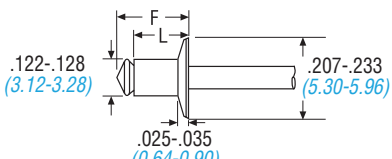
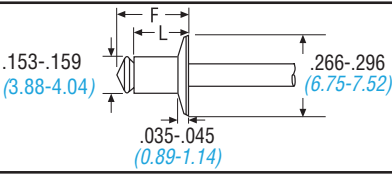


POP® Brand

Open End Rivets

- Strong, low cost fastenings.
- Ideal for wide range of applications.
- Versatile for general fastening needs.
- Available in a range of sizes and materials.

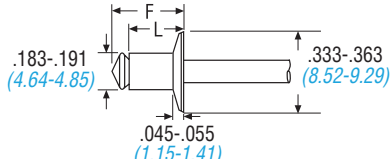

Nominal Rivet Diameter	(L) Nominal Rivet Body Length	(F) Nominal Blind Side Protrusion	 Grip Range	Rivet Part Number	 Hole Size		 Shear Strength	 Tensile Strength
In. (mm)	In. (mm)	In. (mm)	In. (mm)		In. (mm)		Lbs. (n)	Lbs. (n)
C1006-C1010 Steel Body/Steel Mandrel – Large Flange – Finish: Zinc/Protective Coating								
3/16 (4.8)	.300 (7.6)	.460 (11.7)	.063-.125 (1.6-3.2)	SD 62 BS LF	.192-.196 (4.88-4.98)	 .183-.191 (4.65-4.85) .600-.650 (15.36-16.64) .067-.083 (1.72-2.12)	590 (2626)	815 (3627)
	.425 (10.8)	.585 (14.9)	.126-.250 (3.2-6.4)	SD 64 BS LF				
	.550 (14.0)	.710 (18.0)	.251-.375 (6.4-9.5)	SD 66 BS LF				
	.675 (17.2)	.835 (21.2)	.376-.500 (9.5-12.7)	SD 68 BS LF				
	.800 (20.3)	.960 (24.4)	.501-.625 (12.8-15.9)	SD 610 BS LF				
	.925 (23.5)	1.085 (27.6)	.626-.750 (15.9-19.1)	SD 612 BS LF				
1.4 (6.4)	.600 (15.2)	.835 (21.2)	.251-.375 (6.4-9.5)	SD 86 BS LF	.257-.261 (6.53-6.63)	 .249-.255 (6.32-6.48) .720-.780 (18.3-19.8) .098-.107 (2.48-2.71)	1245 (5538)	1505 (6694)
	.850 (21.6)	1.085 (27.6)	.501-.625 (12.7-15.8)	SD 810 BS LF				
	1.100 (27.9)	1.335 (33.9)	.751-.875 (19.1-22.2)	SD 814 BS LF				
C1006-C1010 Steel Body/Steel Mandrel – 120° Countersunk – Finish: Zinc/Protective Coating								
3/32 (2.4)	.225 (5.8)	.325 (8.3)	.063-.125 (1.6-3.2)	SK 32 BS	.097-.100 (2.46-2.54)	 .092-.096 (2.34-2.45) .161-.187 (4.12-4.79) .023-.033 (0.58-0.84)	150 (668)	205 (912)
1/8 (3.2)	.250 (6.5)	.370 (9.4)	.063-.125 (1.6-3.2)	SK 42 BS	.129-.133 (3.30-3.40)	 .122-.128 (3.12-3.28) .207-.233 (5.30-5.96) .025-.035 (0.64-0.90)	295 (1313)	425 (1891)
	.313 (8.0)	.433 (11.0)	.126-.187 (3.2-4.8)	SK 43 BS				
	.375 (9.5)	.495 (12.6)	.188-.250 (4.8-6.4)	SK 44 BS				
	.438 (11.1)	.558 (14.2)	.313-.375 (7.9-9.5)	SK 46 BS				
5/32 (4.0)	.650 (16.5)	.790 (20.1)	.376-.500 (9.6-12.7)	SK 58 BS	.160-.164 (4.06-4.17)	 .153-.159 (3.88-4.04) .266-.296 (6.75-7.52) .035-.045 (0.89-1.14)	410 (1824)	570 (2537)
3/16 (4.8)	.425 (10.8)	.585 (14.9)	.126-.250 (3.2-6.4)	SK 64 BS	.192-.196 (4.88-4.98)	 .183-.191 (4.64-4.85) .333-.363 (8.52-9.29) .045-.055 (1.15-1.41)	590 (2626)	815 (3627)