
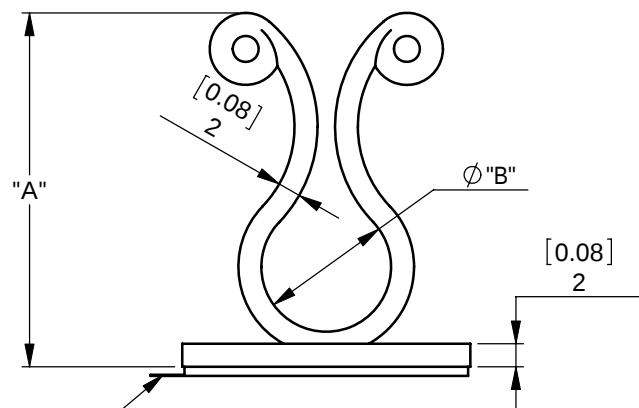
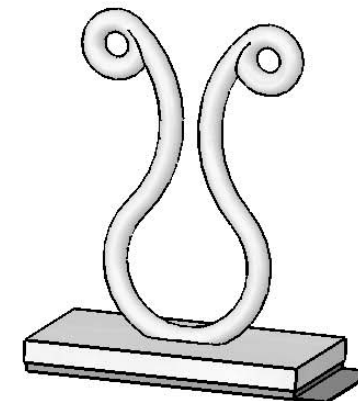


REV.	MODIFICATION.	DATE	DRN
01	ECN2008-003	03/01/08	SF
02	CO 2010798	01/09/09	PH

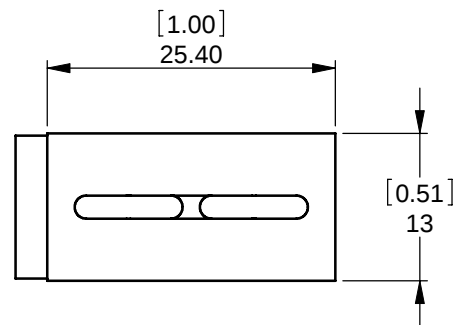

Typical Release
Tab Location


ALTERNATE UNITS FOR REFERENCE ONLY

INFORMATION CONTAINED IN THIS DOCUMENT IS CONFIDENTIAL TO
RICHCO INTERNATIONAL Co. Ltd. AND MAY NOT BE DISCLOSED OR
REPRODUCED IN WHOLE OR PART WITHOUT THEIR WRITTEN CONSENT.

RICHCO, INC.
WWW.RICHCO-INC.COM

ALL DIMENSIONS IN mm
GENERAL TOLERANCES ± 0.25
UNLESS OTHERWISE STATED
1 DECIMAL PLACE $\pm$
2 DECIMAL PLACES $\pm$
ANGULAR $\pm 1^\circ$

THIRD
ANGLE



MATERIAL:
Nylon 6/6 UL94 V-2 (RMS-01)

COLOUR:
Natural

DESCRIPTION:
Kurly Lock On Base

PART No:
See Table

DRG No:
2008-003

NPR No:
XXXX-XXX

SHEET SIZE **A4**

DRN
SF

DATE
03/01/08

CHKD
NB

DATE
03/01/08

SCALE
NTS

SHEET No.
1 OF 1

FORM No. 0143/00

NOTE;

1. ALSO AVAILABLE IN NYLON 6/6 UL94 V-0 BY SPECIAL ORDER. TO ORDER REPLACE SUFFIX "01" WITH "19".

Part No	"A" Ref	"B" Holding Capacity	Adhesive Reference
KLB-350A4-RT	27.2 (1.07)	7.6-10.2 (0.30-0.40)	1.0 (0.04)Thick, Double Sided Acrylic Adhesive RMS-324
KLB-450A4-RT	31.2 (1.23)	10.2-10.7 (0.40-0.50)	
KLB-750A-RT	40.1(1.58)	17.8-20.3 (0.70-0.80)	0.8 (0.03)Thick, Double Sided Acrylic Adhesive RMS-15