

PART NUMBER	FIG	MAX LOOP TENSILE STRENGTH(N)	"W"	"L"	"T"	BUNDLE $\phi$ (MAX)	"A"	"B"	"N"
RG-2100-M	1	80	2.5	100	1	20	25.1	8.15	.80
RG-2200-M				200		50	25.5	8.05	1
RG-2110-M	2			110		20	20.5	9.2	.80
RG-2210-M		210	52	1					
RG-2190-M	3	220	4.8	190	1.4	50	13	27.2	1.1
RG-2270-M				274		75			

REV.	MODIFICATION.	DATE	DRN
01	PRODUCTION RELEASE	17/01/11	SF

FIG: 1

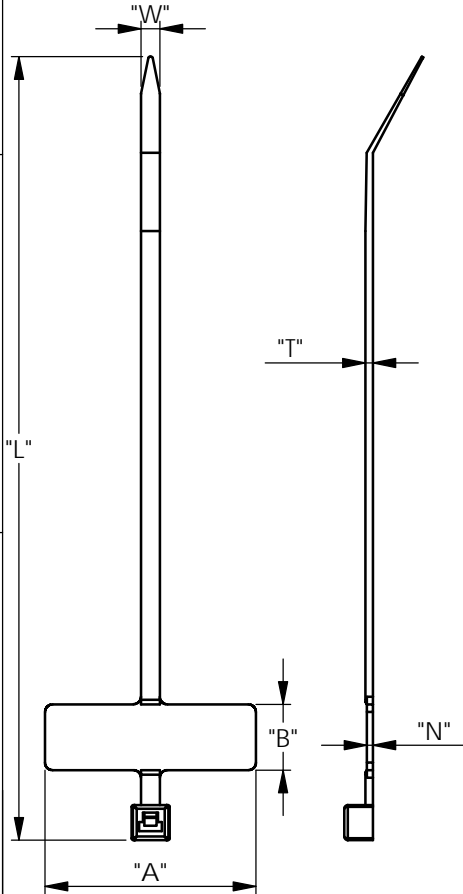


FIG: 2


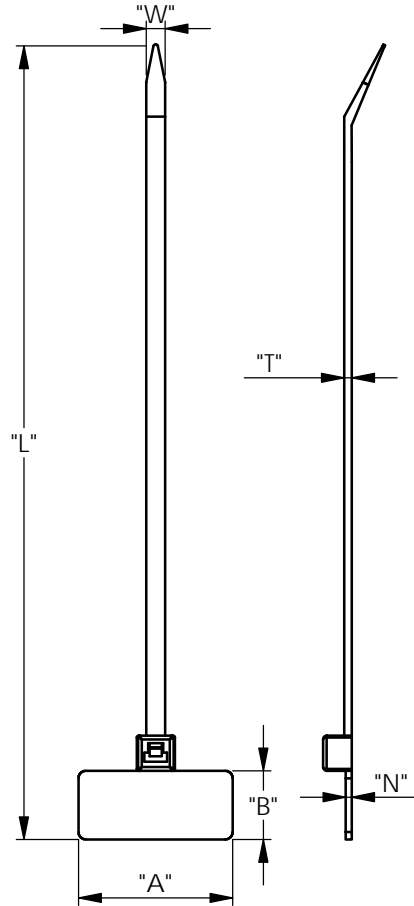


FIG: 3

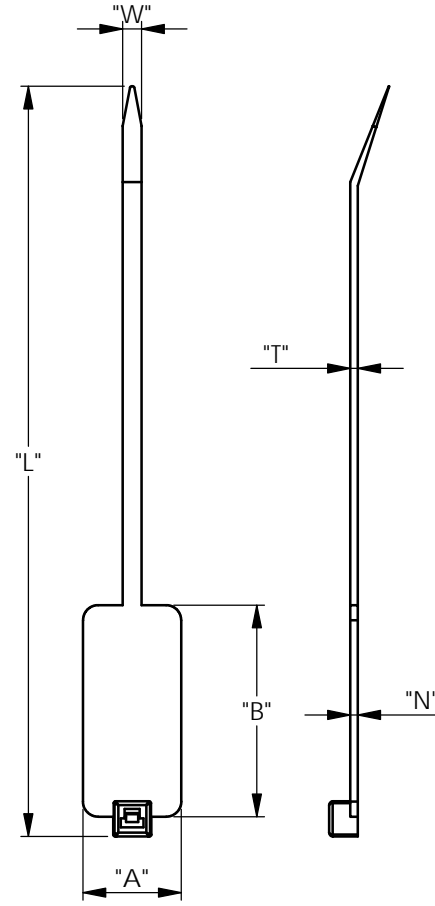


INFORMATION CONTAINED IN THIS DOCUMENT IS CONFIDENTIAL TO RICHCO INTERNATIONAL Co. Ltd. AND MAY NOT BE DISCLOSED OR REPRODUCED IN WHOLE OR PART WITHOUT THEIR WRITTEN CONSENT.

**RICHCO, INC.**  
WWW.RICHCO-INC.COM

ALL DIMENSIONS IN mm  
GENERAL TOLERANCES  $\pm 0.25$   
UNLESS OTHERWISE STATED  
1 DECIMAL PLACE  $\pm$   
2 DECIMAL PLACES  $\pm$   
ANGULAR  $\pm 1^\circ$

THIRD ANGLE



MATERIAL:  
NYLON 6/6 UL94-V2 (RMS-01)

COLOUR:  
NATURAL

DESCRIPTION:  
ID TAG CABLE TIE

PART No:  
See Table

DRG No:  
011-006

SHEET SIZE A4

DRN  
SF

DATE  
17/01/11

CHKD  
JK

DATE  
18/01/11

SCALE  
NTS

SHEET No.  
1 OF 1