


SRCS Countersunk Snap Rivets




C

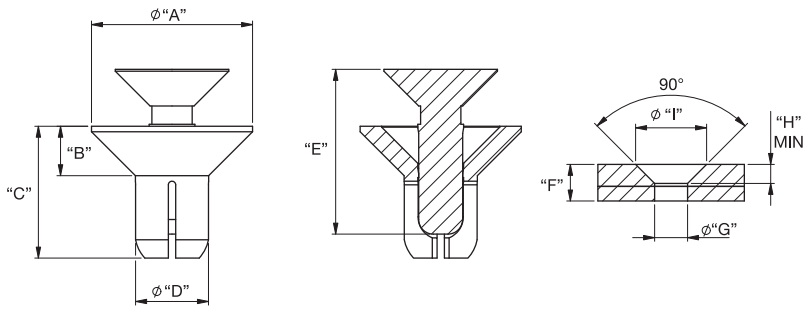

Material: UL94 V2 Nylon 6, RMS-52						Standard Pack: 1000/Bag				
Part No.		"A"	"B"	"C"	"D"	"E"	Total Holding Thickness "F"	Hole Ø "G"	"H"	"I"
Color: Black	Color: White									
SRCS-4060B	SRCS-4060W	8.8	2.7	6	4	7.1	3.5-4.5	4.1-4.2	2.6	9.4
SRCS-4070B	SRCS-4070W			7.2		9	4.5-5.5			
SRCS-4080B	SRCS-4080W			8		11	5.5-6.5			
SRCS-4090B	SRCS-4090W			9			6.5-7.5			
SRCS-4100B	SRCS-4100W			10			7.5-8.5			
SRCS-5065B	SRCS-5065W	9.8		6.5	5	8.5	3.5-4.5	5.1-5.2		10.4

Accommodates countersunk hole specification DIN ISO 7721

SRHR Snap Rivet Heat Resistant

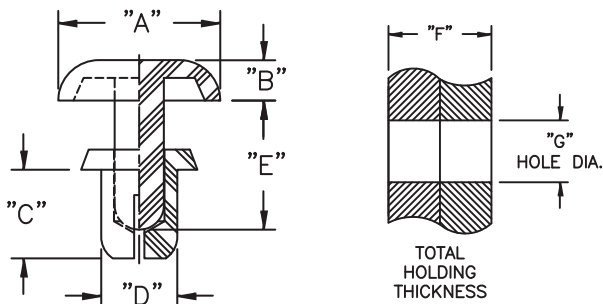

Feature

- Withstands temperatures up to 130° C

Material: UL94 V2 Nylon 4/6, RMS-109 Color: Tan				Standard Pack: 1000/Bag			
Part No.	Hole Ø "G"	Total Holding Thickness "F"	"A" Ø	"B"	"C"	"D" Ø	"E"
SRHR-3035	3.1 - 3.2	1 - 2	6.4	1.6	3.5	3	5.1
SRHR-3045		2 - 3			4.5		6.1
SRHR-3055		3 - 4			5.6		6.1
SRHR-3065		4 - 5			6.5		7.1
SRHR-3080		5 - 6.5			8		9
SRHR-3535	3.6 - 3.7	1.2 - 2.1	6.4	1.6	3.5	3.5	5.1
SRHR-3545		2.2 - 3.1			4.5		6.1
SRHR-3555		3 - 4			5.6		7.1
SRHR-4050	4.1 - 4.2	2.5 - 3.5	8	1.8	5	4	7.1
SRHR-4060		3.5 - 4.5			6		7.1
SRHR-4070		4.5 - 5.5			7.2		9
SRHR-4080		5.5 - 6.5			8		9
SRHR-4100		7.5 - 8.5			10		11