
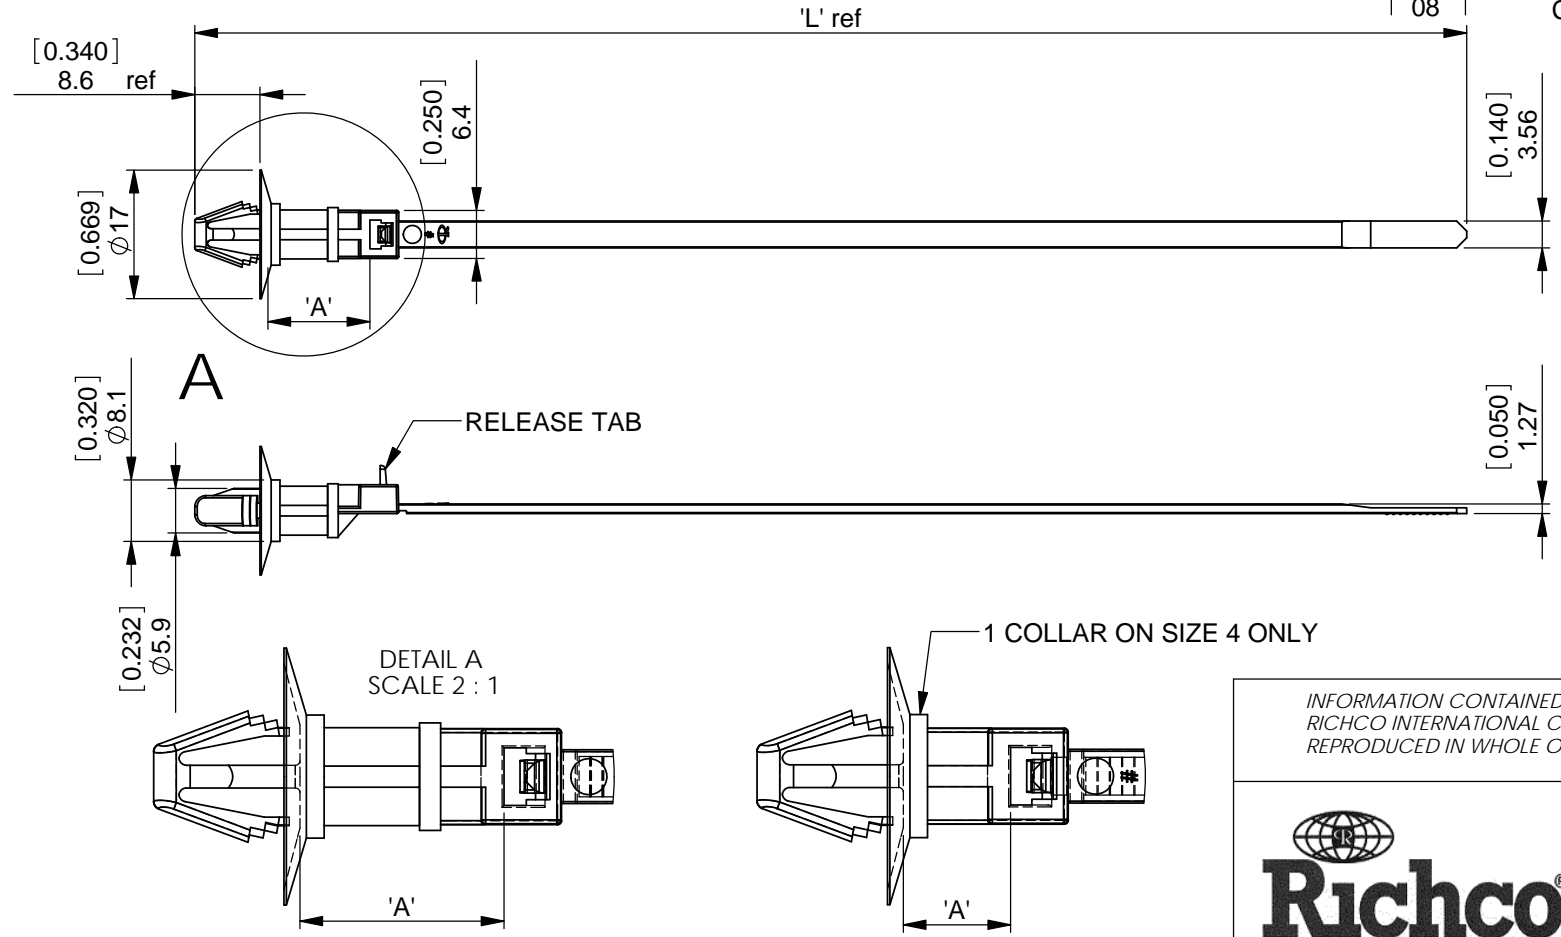


- NOTES:
- 1) TO FIT IN A $\phi 6.0 - 6.5$ [.236 - .255] HOLE.
 - 2) PANEL THICKNESS $0.6 - 2.5$ [.023 - .098] IN 0.2 [.008] INCREMENTS.
 - 3) OTHER MATERIALS AVAILABLE BY SPECIAL ORDER. ADD '-HS', '-V0', '-UVB' OR '-HT' TO THE END OF THE PART NUMBER, EXAMPLE WIT-30RCA-4-V0
 - a) HEAT STABILIZED NYLON 6/6 UL94 V-2, RMS-47, COLOUR: BLACK
 - b) NYLON 6/6 UL94 V-0, RMS-19, COLOUR: NATURAL
 - c) UVB STABILIZED NYLON 6/6 UL94 V-2, RMS-46, COLOUR: BLACK
 - d) HIGH TEMPERATURE NYLON 4/6 UL94 V-2, RMS-109, COLOUR: NATURAL

REV.	MODIFICATION.	DATE	DRN
01	PRODUCTION RELEASE	13/11/07	NJB
02	ECN2007-229	10/12/07	OW
03	ECN2007-236	14/12/07	NJB
04	ECN2008-014	22/01/08	SF
05	CO-2010036	11/02/08	OW
06	CO-2010179	09/04/08	MT
07	CO-2010232	14/05/08	SF
08	CO-2010555	10/02/09	TC

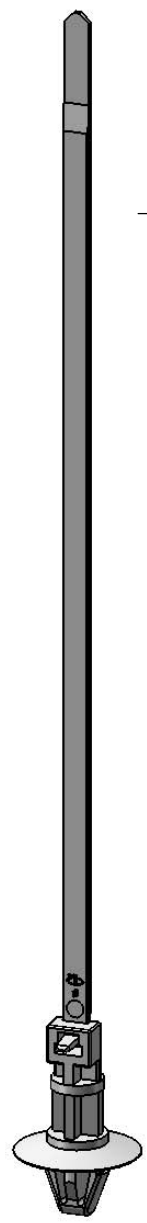

WIT-30RCA-16	180.2 [7.094]	25.4 [1.00]	13 [30]	31.8 [1.250]
WIT-30RCA-12	174.6 [6.874]	19.8 [.779]	13 [30]	31.8 [1.250]
WIT-30RCA-8	168.3 [6.625]	13.5 [.531]	13 [30]	31.8 [1.250]
WIT-30RCA-4	160.7 [6.326]	7.1 [.279]	13 [30]	31.8 [1.250]
PART No.	'L' Ref	'A' Ref	MIN. LOOP TENSILE Kg [lbs]	MAX BUNDLE DIAMETER

INFORMATION CONTAINED IN THIS DOCUMENT IS CONFIDENTIAL TO RICHCO INTERNATIONAL Co. Ltd. AND MAY NOT BE DISCLOSED OR REPRODUCED IN WHOLE OR PART WITHOUT THEIR WRITTEN CONSENT.

Richco

METRIC PRIMARY UNITS: mm
 IMPERIAL SECONDARY UNITS: [inches]
 GENERAL TOLERANCES ± 0.25 [0.010]
 UNLESS OTHERWISE STATED
 1 DECIMAL PLACE \pm
 2 DECIMAL PLACES \pm
 ANGULAR $\pm 1^\circ$

THIRD ANGLE

MATERIAL: NYLON 6/6 UL94 V-2 (RMS-01) COLOUR: NATURAL

DESCRIPTION: CABLE TIE WITH CUPPED BASE PART No: SEE TABLE

DRG No: 07-121 NPR No: 2007-048 SHEET SIZE A4

DRN NJB DATE 31/10/07 CHKD TC DATE 31/10/07 SCALE NTS SHEET No. 1 OF 1