



37 Draw Latch

Flexible · Over-center · Lever assist

- Flexible heavy-duty
- Detent feature
- Absorbs and reduces vibration

Material and Finish

EPDM rubber and glass-filled nylon black with stainless steel pins

Performance Details

Clamping force:

Heavy-duty: 350 N (79 lbf)

Small: 110 N (25 lbf)

Large: 190 N (43 lbf)

Operating temperature range:
-40°C (-40°F) to 80°C (175°F)

Flammability rating: UL94-HB

Installation Notes

Heavy-duty:





Install assembly with $\varnothing 6$ (.250) rivets or M6 (1/4) screws (not supplied)

Small and Large:

Install assembly with $\varnothing 5$ (3/16) rivets or M5 (No 10) screws (not supplied)

Notes

5 (.20) Max. non co-planar offset

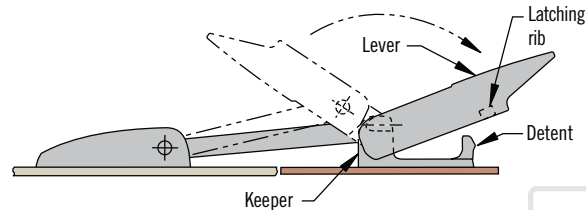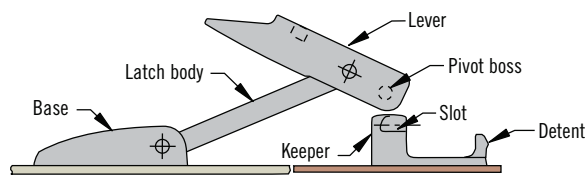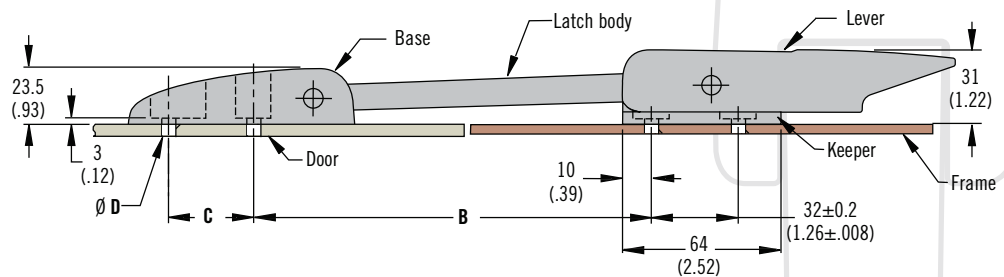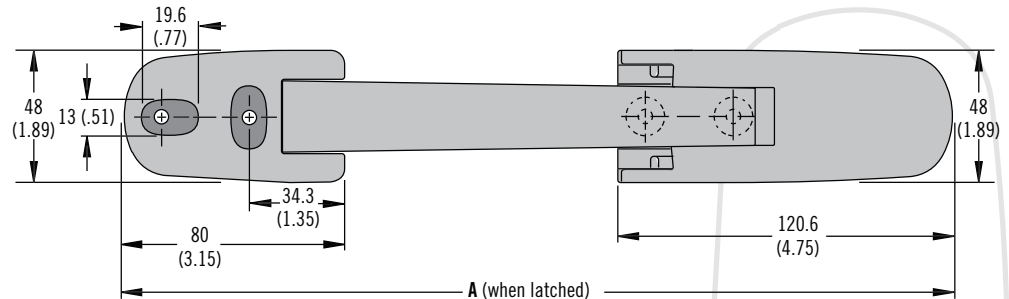

A
ACTUAL SIZE

Part Number

See table

Assembly complete with keeper

Part Number	Dimensions			
	A	B	C±0.2 (.008)	D±0.1 (.004)
37-30-294-60	254 (10)	97±3 (3.82±.12)	25.4 (1.00)	5.5 (.217)
37-30-297-60	379 (15)	222±6 (8.74±.24)		
Heavy-Duty				
37-40-295-60	300 (12)	144±4 (5.67±.16)	32 (1.25)	6.6 (.260)

Dimensions in millimeters (inch) unless otherwise stated



www.southco.com/37A