



37 Draw Latch

Flexible · Pull type · T-handle

- Flexible one piece molded latch

Material and Finish

EPDM rubber and stainless steel

Performance Details


Average clamping force:
49 N (11 lbf)

Operating temperature range:
-20°C (0°F) to 95°C (200°F)

Installation Notes

Install assembly with four $\varnothing 5(.188)$ rivets or M5 (No. 10) screws (not supplied)

Large

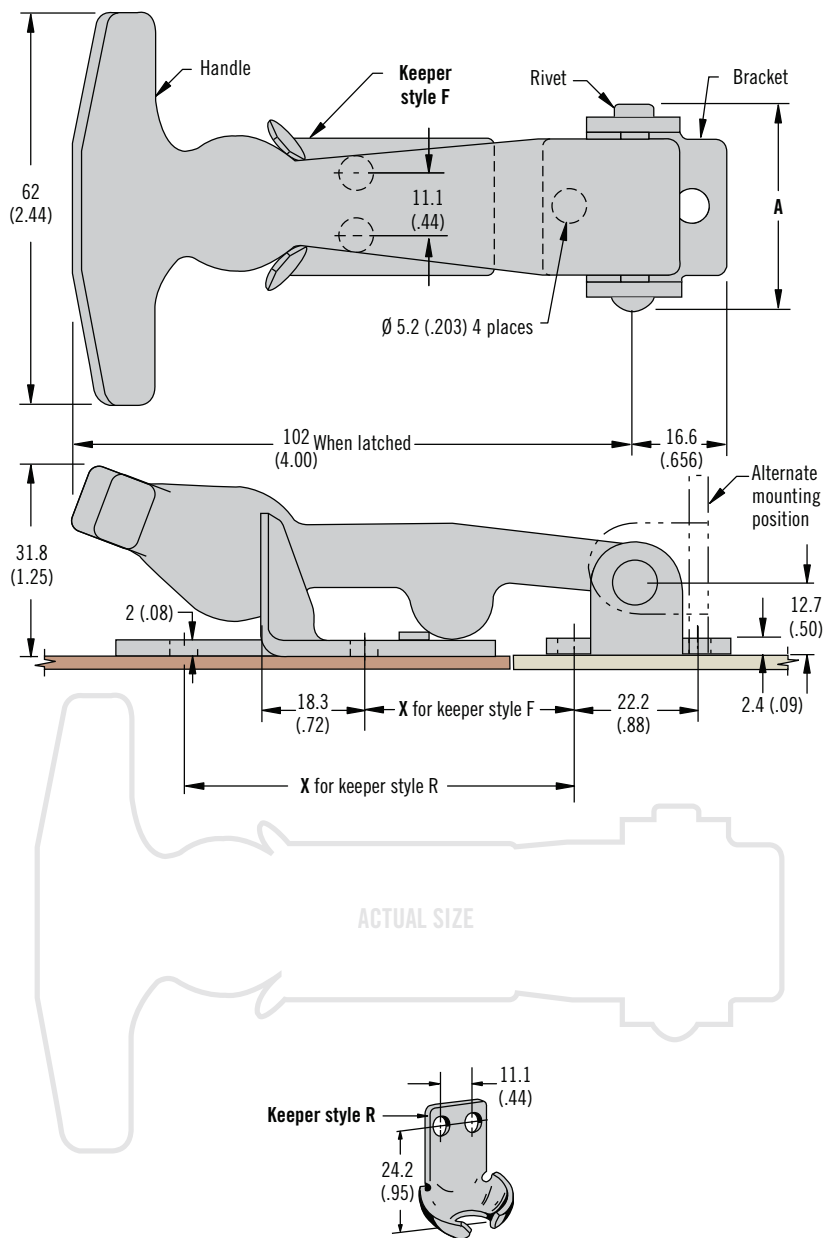

Part Number

See table

Assembly complete with keeper

Part Number						
Keeper Style	X	Latch shipped assembled			Latch shipped unassembled	
		A	Steel	Stainless Steel	A	Steel
F	38.1 (1.50)	31.8 (1.25)	37-10-086-10	37-10-086-20	34 (1.34)	37-10-087-10
R	73 (2.88)		37-20-086-10	37-20-086-20		37-20-087-10

Dimensions in millimeters (inch) unless otherwise stated