


Southco® Pawl/Cam Action Latches

Arrowhead Style

- Arrow acts as pawl indicator
- Single-hole installation

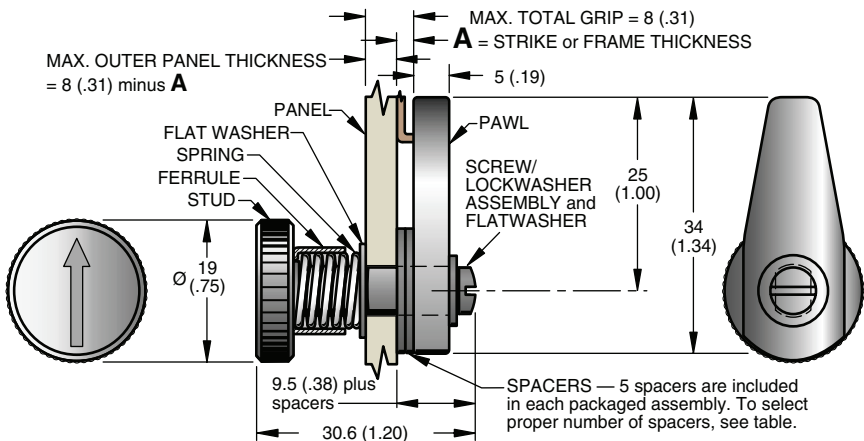


Material and Finish

STUD: Brass, bright chrome plated.
 FERRULE: Brass, bright nickel plated.
 PAWL: 1010 Steel, zinc immersion coating.
 SPRING: 302 Stainless steel, passivated.
 FLAT WASHER: 302 or 304 Stainless steel, natural.
 SPACERS: 5052 Aluminum, natural.
 SCREW/LOCKWASHER ASSEMBLY and WASHER: Steel, zinc plate, chromate plus sealer.

Latch is shipped unassembled. One unit per bag.

Panel Preparation

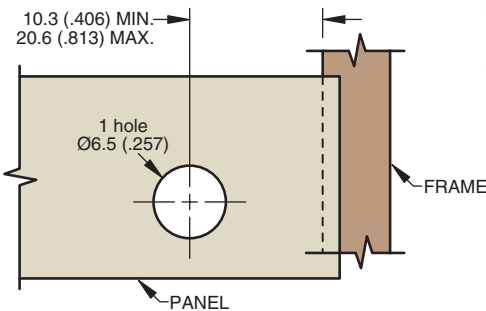

Installation

1. After preparing panel, slide ferrule, spring and medium size washer onto shaft.
2. Insert stud shaft through hole of outer panel and slide required number of spacers (0-5) onto shaft.
3. Retain pawl on end of shaft with screw hardware.

PART NUMBER
 49-2 •

Product Strength Guidelines

(To assist in your product selection; samples are available for your evaluation.)
 Maximum static load = 220 N (50 lbs.)
 Average Ultimate load = 900 N (200 lbs.)

When A dim. is...	0.00 to 1.5 (.000) to (.060)	1.5 to 2.8 (.061) to (.111)	2.8 to 4.1 (.112) to (.162)	4.1 to 5.4 (.163) to (.213)	5.4 to 6.7 (.214) to (.264)	6.7 to 7.9 (.265) to (.312)
No. of spacers to be used	0	1	2	3	4	5

millimeter (inch)
 millimeter
 (inch)

Dimensions without tolerances are for reference only.