


# 64 Push-to-Close Latch

Pull-to-open · Paddle latch · Small

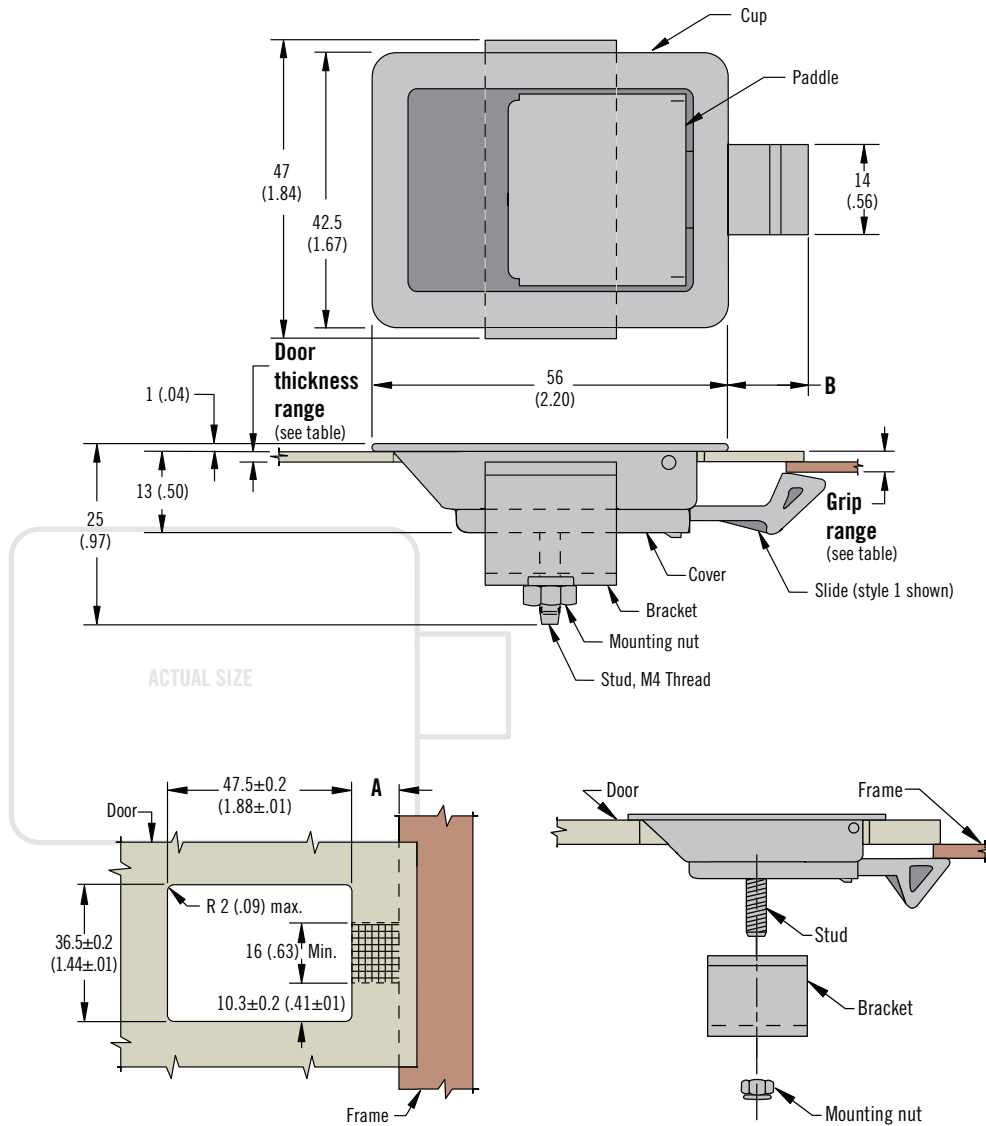

- Single hole installation
- Concealed mounting
- Plastic slide

### Material and Finish

Stainless steel passivated and brushed or black powder coated and glass reinforced nylon, natural

### Performance Details

Max. working load:

Style	Max. Static Load N (lbf)
1	130 (30)
2	110 (25)
3	90 (20)
4	70 (15)
5	55 (12)


Operating temperature range:  
-18°C (0°F) to 100°C (210°F)

Flammability rating: UL94-V0

### Installation Notes

Door thickness must not exceed T dimension (see table) in area through which slide will operate. It may be necessary to reduce thickness of door in area indicated by grid.

Slide styles:

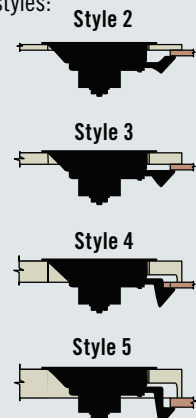

Grip Range		Slide Style	A		B	T (See Notes)	Part Number Brushed Finish			
			Min.	Max.			Door Thickness Range			
Min.	Max.		Min.	Max.			3.7 (.144) Max.	3.9 - 7.3 (.154 - .288)	11.1 - 14.6 (.437 - .576)	18.6 - 22 (.734 - .868)
1.2 (.05)	2 (.08)	1	10.4 (.41)	12.7 (.50)	12.4 (.49)	1.6 (.063)	64-10-111-50	~	~	~
2.8 (.11)	3.6 (.14)	2	11.9 (.47)	14.2 (.56)	14.2 (.56)	3.2 (.125)	64-10-113-50	64-10-133-50	~	~
6 (.23)	6.7 (.27)	3				6.4 (.250)	64-10-124-50	64-10-114-50	~	~
12.3 (.48)	13.1 (.52)	4				7.1 (.281)	64-10-125-50	64-10-135-50	64-10-115-50	64-10-115-50
18.6 (.73)	19.4 (.77)	5				7.1 (.281)	64-10-126-50	~	64-10-116-50	64-10-116-50

### Notes

For an assembly with black powder coated finish change last digit from 0 to 5 - Example: 64-10-111-55