


DRAWING NUMBER: J-97-50-21-4
 SCALE: NTS
 CHG: TCC
 DATE: 12-22-83
 DRAWN: TCC
 No 97 DRAW CATCH (WITH SECURITY FEATURES)-Mounting Specifications Assemblies With Snap-Lock


LEVER STYLE	SPRING RATING	SPRING LENGTH	PART NUMBER	L	S
ACTUATING TAB UP	LIGHT DUTY	SHORT	97-50-310-2X	29.4 / 5/32	32.8 / 1 1/4
		MEDIUM	97-50-320-2X	42.1 / 1 1/4	44.4 / 1 3/4
		LONG	97-50-330-2X	54.8 / 2 5/32	57.1 / 2 1/4
	HEAVY DUTY	SHORT	97-50-350-21	29.4 / 5/32	32.8 / 1 1/4
		MEDIUM	97-50-360-21	42.1 / 1 1/4	44.4 / 1 3/4
		LONG	97-50-370-21	54.8 / 2 5/32	57.1 / 2 1/4
ACTUATING TAB DOWN	LIGHT DUTY	SHORT	97-50-410-2X	29.4 / 5/32	32.8 / 1 1/4
		MEDIUM	97-50-420-2X	42.1 / 1 1/4	44.4 / 1 3/4
		LONG	97-50-430-2X	54.8 / 2 5/32	57.1 / 2 1/4
	HEAVY DUTY	SHORT	97-50-450-21	29.4 / 5/32	32.8 / 1 1/4
		MEDIUM	97-50-460-21	42.1 / 1 1/4	44.4 / 1 3/4
		LONG	97-50-470-21	54.8 / 2 5/32	57.1 / 2 1/4

DRAWING NUMBER: J-97-50-21-4

PART NUMBER SUFFIX-INDICATES MATERIAL & FINISH
 21~LEVER,BASE,SPRING.-STEEL;ZINC PLATE,BRIGHT. PIN & RIVET-S/S; NATURAL
 SNAP LOCK-STEEL, ZINC PLATE PLUS BLACK ORGANIC COATING.
 22~LEVER, BASE AND SPRING- STAINLESS STEEL, PASSIVATE.
 PIN AND RIVET- STAINLESS STEEL, NATURAL. SNAP LOCK- STAINLESS STEEL , BLACK ORGANIC COATING

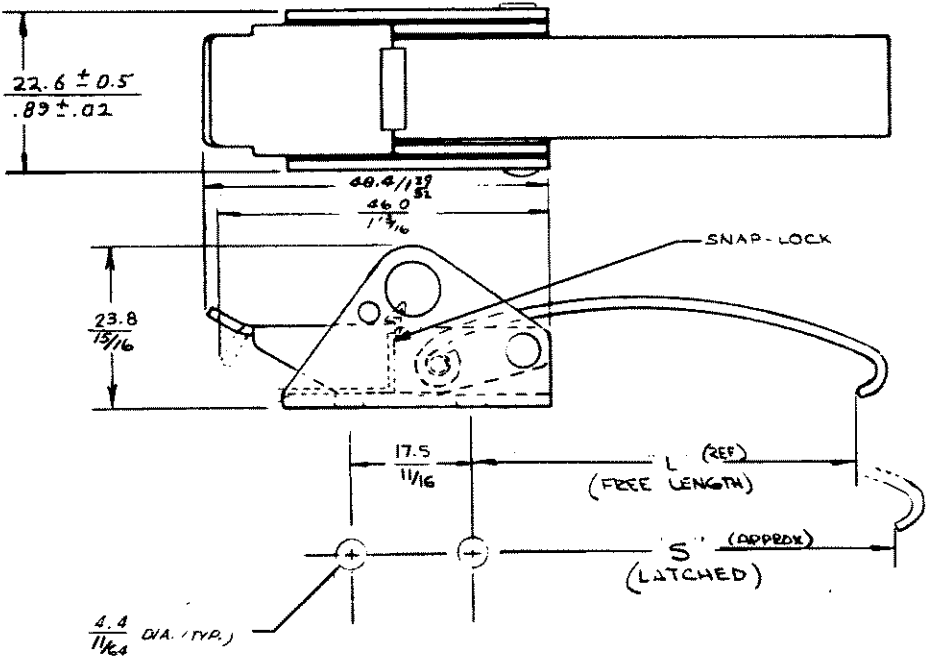

NOTE ~ SNAP-LOCK SHIPPED UNASSEMBLED

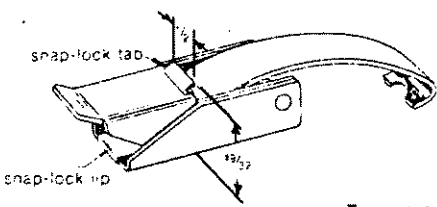

To install
 While installing latch base, position turned down lip of snap-lock against rear edge of base to align mounting holes. Insert mounting screw or rivet through both parts.

To open, push snap-lock tab forward and lift latch lever.
 To close, just push lever back down, snap-lock will spring to locked position

NOTE ~ LATCH SHOWN IS A TYPICAL ONE WITHOUT SECURITY FEATURES.

PROPRIETARY ITEM- EXCEPT FOR USES EXPRESSLY GRANTED IN WRITING, INFORMATION DISCLOSED HEREON IS CONFIDENTIAL AND ALL RIGHTS, PATENT AND OTHERWISE, ARE RESERVED BY SOUTHCO, INC.

REV. A 4-24-84 DEM PRN 97-69
 REV. B 11-4-86 JSS PRN: 97-109
 REV. C 5-27-90 PRN 97-150
 REV. D 12 JAN 93 JC PRN 5-1-85

3/32 INCH