
BASE

Southco® Push to Close Latches


Quarter-turn to Open

- Tool-operated style offers added security

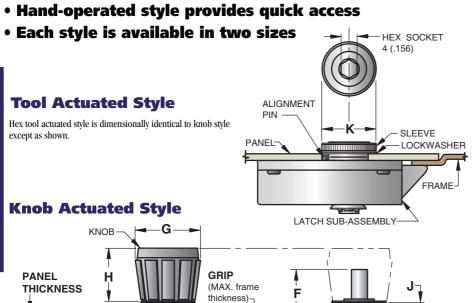

SLIDE

Ε



Material and Finish

HOUSING: 1010 Steel, zinc plated

plus sealer.

SLIDE and PINION: Die-cast zinc, black

organic coating.

BASE: Die-cast zinc with chemical

protective coating.

SPRING: 302 Stainless steel, passivated. RETAINER: Spring steel, zinc plated plus

chromate dip.

LATCH SUB-

ASSEMBLY


LOCKWASHER: Spring steel, zinc

immersion coating.

SLEEVE: Low carbon steel, black


organic coating. KNOB: Nylon, black.

	PANEL THICKNESS		GRIP (Max. frame thick-	DIMENSIONS										PART NUMBERS	
SERIES				A	В	C	D	E	F	G	н	J	K	Knob Actuated Style	Hex Tool Actuated Style
	MIN.	MAX.	ness)												
40	1 (.036)	3.2 (.125)	1.6 (.063)	35 (1.38)	23	13.5 (.53)	11 (.43)	6.5 (.25)	14 (.55)	15 (.59)	15 (.59)	2.5 (.09)	14.5 (.56)	A6-40-11 2 -10 ●	A6-40-31 2 -10
40			3.2 (.125)		(.91)	15 (.59)	12.5 (.49)							A6-40-11 4 -10 •	A6-40-31 4 -10 •
60	1 (.036)	4.8 (.188)	4.8 (.188)	52.5 (2.06)	32 (1.25)	21 (.83)	18.5 (.73)	9.5 (.38)	19 (.74)	24.5 (.97)	19 (.75)	3 (.13)	19 (.75)	A6-60-11 6 -10 ●	A6-60-31 6 -10 ●



 $\mathbb{Z}_{\mathsf{HOUSING}}$

SERIES	ØL	M	WRENCH PART NO.
40	11.2±0.1 (.437 ^{+.008} ₀₀₀)	16 ±1.5 (.63±.06)	A6-0-15640-11●
60	16±0.1 (.625+.008)	24 ±2.2 (.94±.09)	A6-0-15641-11●

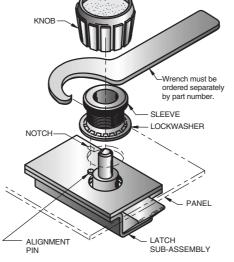

Installation

Prepare hole in panel as shown.

Pass shaft of latch through hole from back side of panel, fit alignment pin into notch, apply lockwasher and thread sleeve over shaft from front side of panel. **Note:** Alignment pin is for proper orientation and alignment of latch during installation only. When tightening sleeve, be sure to hold latch firmly in position.

This completes installation of tool actuated style. For knob style, orient shaped hole in knob with flat on shaft and press knob fully onto shaft.

millimeter (inch) millimeter Dimensions without tolerances are for reference only.