



REVISION HISTORY			
REV	DATE	BY	DESCRIPTION
1	01NOV2013	MTS/MGG	PRN: INITIAL RELEASE


LATCH SUB ASSEMBLY

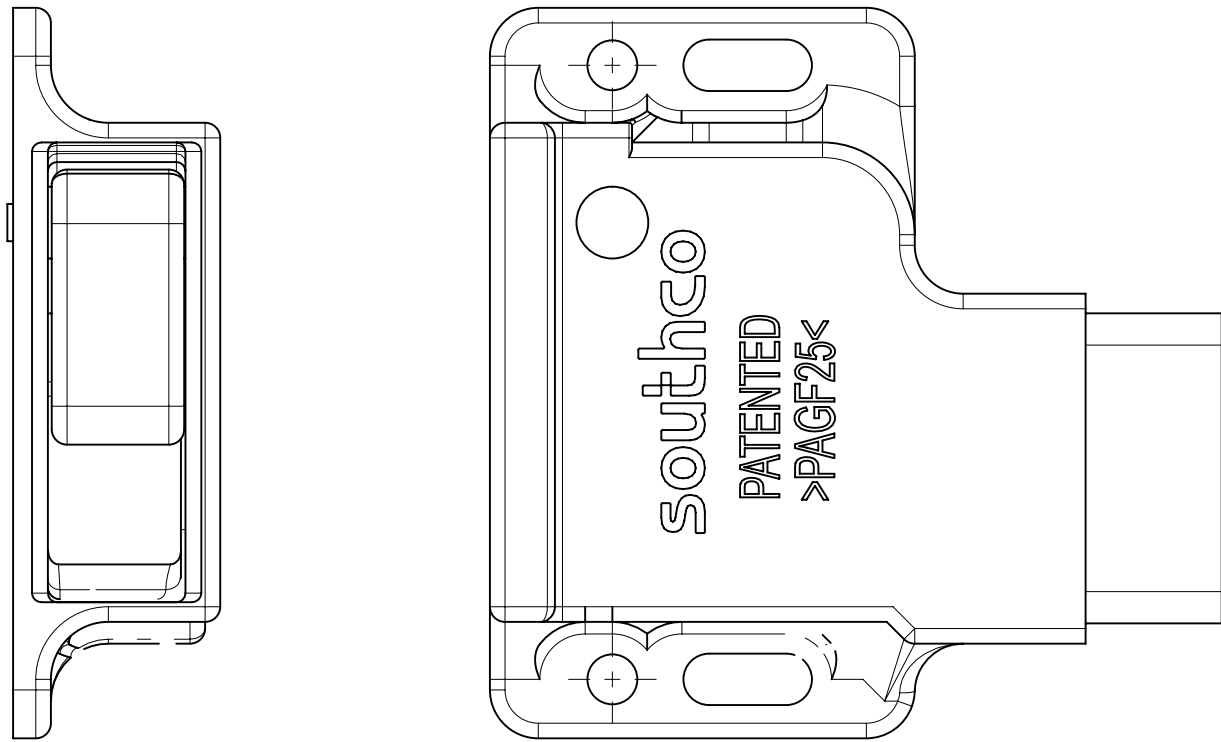

LATCH SUB ASSEMBLY
PAWL OUT POSITION

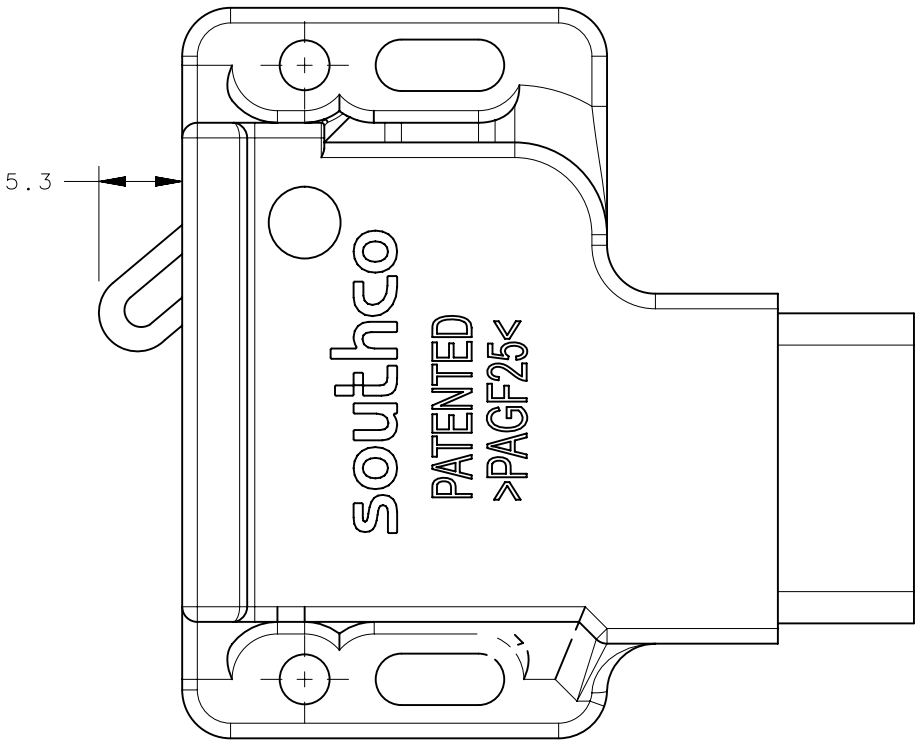


KEEPER

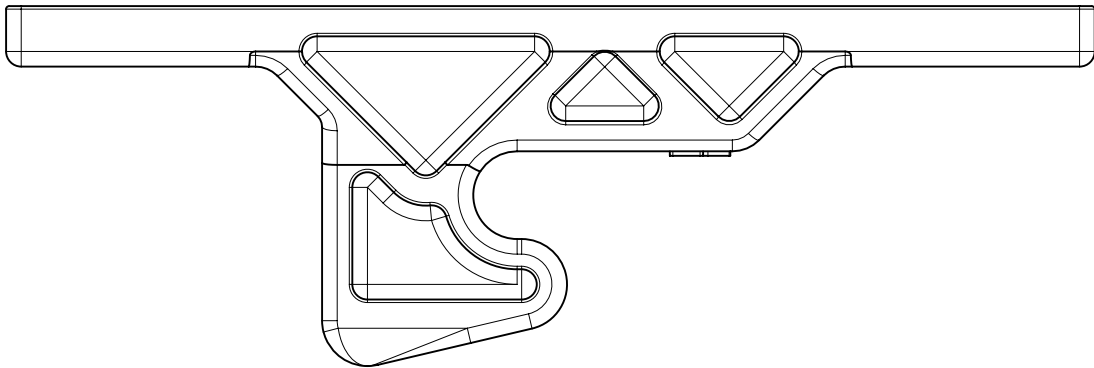

- NOTES:
- A. SAME AS C3-1803 BUT WITH LOWER RATED SPRING - C3-0-56806, 1.65N/mm.
- B. SEE J-C3-18 FOR INSTALLATION AND OPERATIONAL INSTRUCTIONS.

KEEPER	-	1	NYLON (20% GF)-BLACK
HOUSING SUB ASSEMBLY	-	1	NYLON - BLACK
ASSEMBLY	C3-99-329	1	-
ITEM	PART NUMBER	QTY	MATERIAL

	THIRD ANGLE PROJECTION					southco® CONNECT • CREATE • INNOVATE			
	MILLIMETERS [IN]								
	TOLERANCES UNLESS OTHERWISE NOTED		DESCRIPTION Push to Close Latch						
SURFACE AREA			SIZE A3		SYSTEM NX		DWG NO. J-C3-99-329		
VOLUME									
PROPRIETARY ITEM EXCEPT FOR USES EXPRESSLY GRANTED IN WRITING, INFORMATION DISCLOSED HEREON IS CONFIDENTIAL AND ALL RIGHTS, PATENT AND OTHERWISE, ARE RESERVED BY SOUTHCO, INC.									
PER ASME Y14.5M-1994		DRAWN BY MTS		DATE 01NOV2013		SCALE 2:1		SHEET 1 OF 1	