


# C5 Compression Latch

## Small · Sealed lever latch

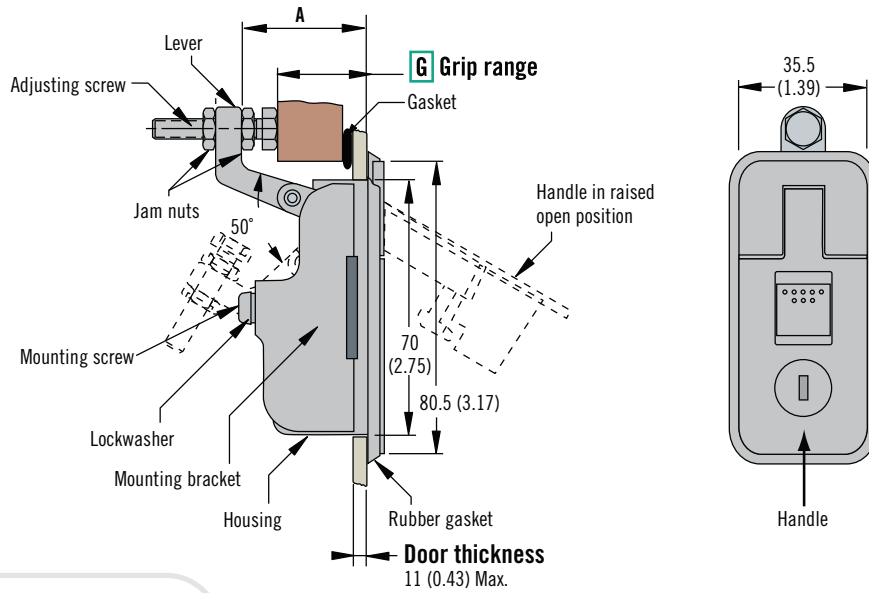

- Low profile when latched
- Easy grip adjustment
- Push button actuation

### Material and Finish

Zinc alloy, powder coated and steel, zinc plated

### Performance Details

Max. static load:

Grip 1 - 25 (.04 - .98):

290 N (65 lbf)

Grip 15 - 30 (.59 - 1.18):


170 N (40 lbf)

### Sealing Notes


Environmental sealing is achieved by sealing the mounting screw threads

### Keys

See page 58

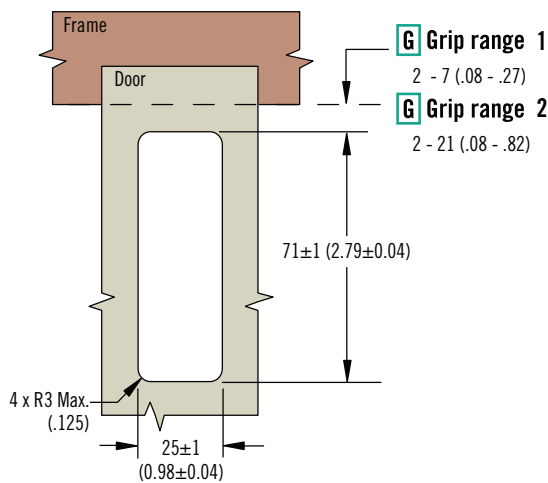

### Part Number Selection

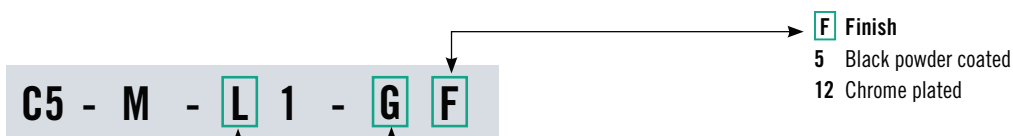

- L** Lock style
- 1 Non-locking
  - 3 Key-locking with dust shutter, keyed alike CH751 (two flat keys supplied)

	<b>G</b> Grip Range	<b>A</b>
1	1 - 25 (.04 - .98)	36.5 (1.44)
2	15 - 30 (.59 - 1.18)	40.0 (1.57)