



CM Cam Locks

Removable core

- Ideal for applications requiring multiple key codes or tool actuated options
- Sealed version meets NEMA 4 and IP65 water intrusion standards
- Lock cores and cams sold separately
- Master and non-master key codes available

Material and Finish

Housing: Zinc alloy, chrome plated or black powder coated
 Scalp: stainless steel (non-sealed only)

Performance Details

Average ultimate load on cam: 180 N (40 lbf)

Installation Notes

See page 183

Accessories

See page 193

Part Number Selection

Housing part number (no lock core or cam)


Order housing, lock core and cam separately

Lock core part numbers and installation see page 183


Cam page 191

To select cam part number see grip table page 187

Sealed Disc Tumbler

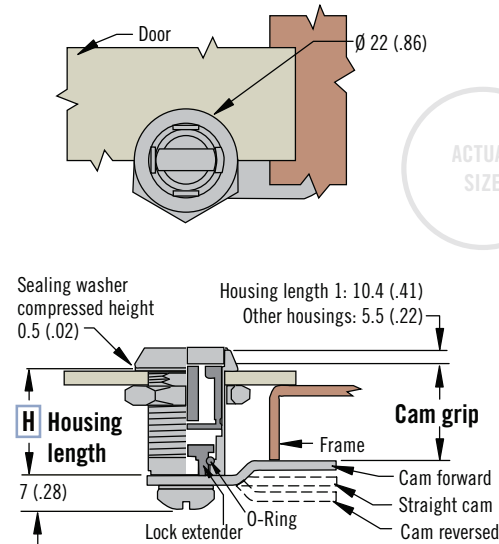


Non-Sealed Disc Tumbler

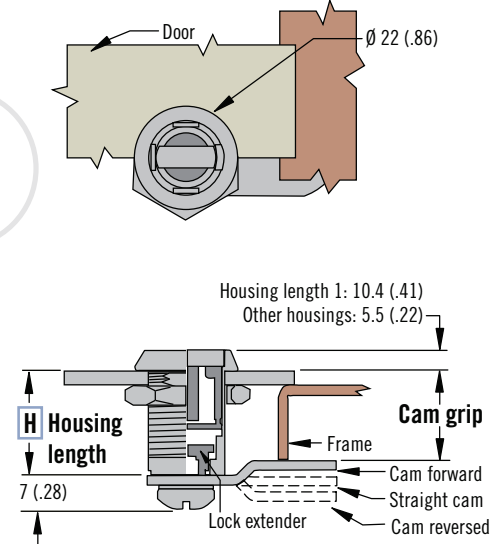


Cam Rotation


R 01 (Clockwise)

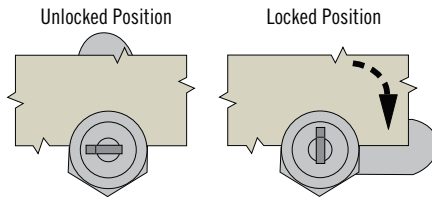

R 09 (Counter-Clockwise)

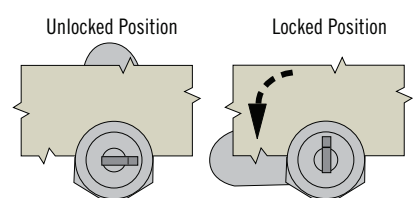

Sealed Version

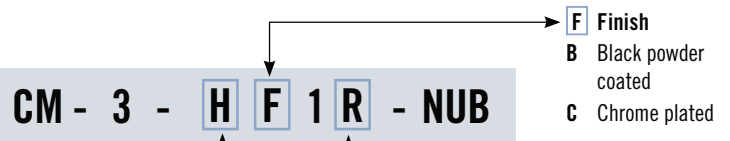

Max. Door Thickness	Housing Length	H Housing Length Number
7.1 (.28)	16 (.625)	1
13.5 (.53)	22 (.875)	2
19.8 (.78)	28.5 (1.125)	6
26.2 (1.03)	35 (1.375)	3
32.5 (1.28)	41 (1.625)	4
38.9 (1.53)	48 (1.875)	5

Non-sealed version



Dimensions in millimeters (inch) unless otherwise stated