

E3 VISE ACTION® Compression Latch

Large · Zinc and plated steel · Wing knob · Fixed grip



- Consistent pre-set compression
- Minimal internal protrusion
- Multiple key codes

Material and Finish

Zinc alloy, powder coated and steel, zinc plated

Performance Details

Max. static load: 300 N (67 lbf)

Sealing Notes

NEMA 4 / IP65 sealing is achieved by using gasket supplied.





Installation Notes

Recommended tightening torque for the mounting nut is 20 N·m (176 in·lbf), and for the mounting screw is 10 N·m (88 in·lbf)

Keys and Accessories

Key CH751 page 58
Key R001 page 58
Washers and sleeve nut see page 60

Part Number Selection

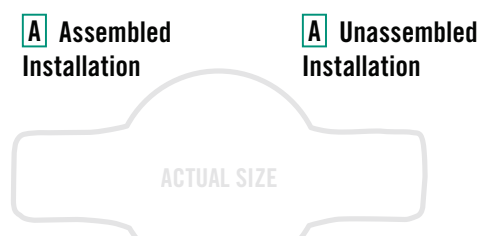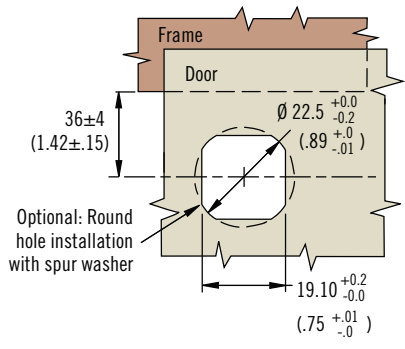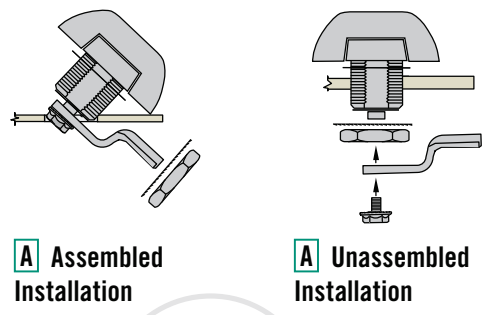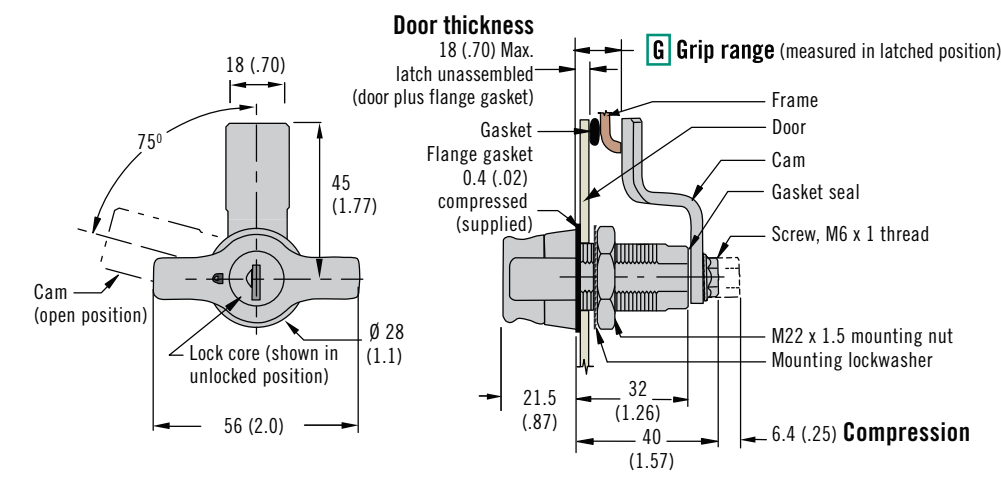

- | | |
|--------------------------|--|
| A Assembly status | L Lock style |
| 10 Assembled | 50 Wing knob, non-locking |
| 12 Unassembled | 51 Wing knob, locking, keyed CH751 (1 overmolded key supplied) |
| | 58 Wing knob, locking, keyed R001 (1 overmolded key supplied) |

E3 - A L - G 5

Grip Table											
Total Grip	G	Max. Door Thickness for Assembled Latch	Total Grip	G	Max. Door Thickness for Assembled Latch	Total Grip	G	Max. Door Thickness for Assembled Latch	Total Grip	G	Max. Door Thickness for Assembled Latch
15 (.59)	00	Use unassembled	25 (.98)	05	5 (.20)	35 (1.38)	10	7 (.28)	45 (1.77)	15	7 (.28)
17 (.67)	01	Use unassembled	27 (1.06)	06	6 (.24)	37 (1.46)	11		47 (1.85)	16	
19 (.75)	02	1 (.04)	29 (1.14)	07	7 (.28)	39 (1.53)	12		49 (1.93)	17	
21 (.83)	03	2 (.08)	31 (1.22)	08		41 (1.61)	13		51 (2.01)	18	
23 (.91)	04	4 (.16)	33 (1.30)	09		43 (1.69)	14		53 (2.09)	19	