



E5 Cam Latch Low Profile

Zinc · Tool or hand operated · Fixed grip

- Single hole install
- Latched / unlatched indicator
- Shipped fully assembled

Material and Finish

Zinc alloy, powder coated or chrome plated and steel, zinc plated

Performance Details


Max. static load: 330 N (74 lbf)

Installation Notes


Mounting nut
Max. tightening torque:
10 N·m (88 in-lbf)

Keys and Accessories

See pages 98 - 101

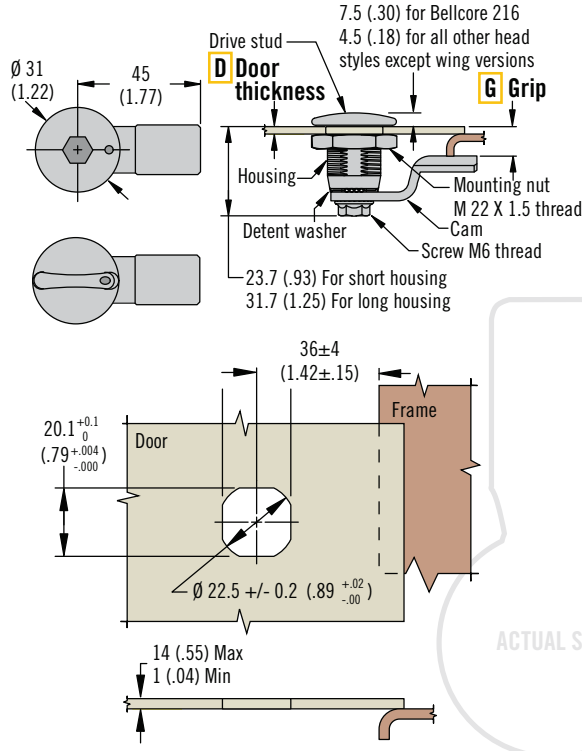


H Head Styles

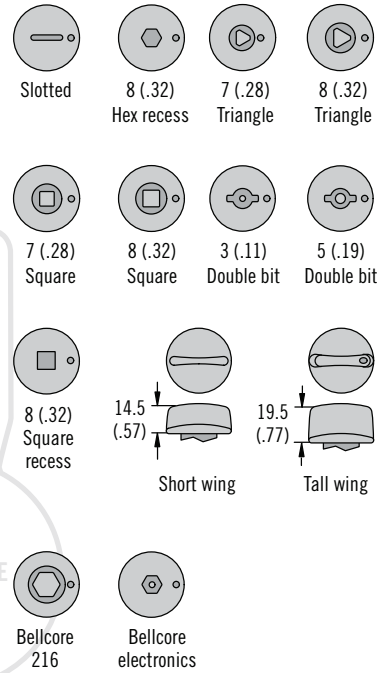

Part Number Selection

Latch is shipped fully assembled
For door thicknesses
1 - 6 (.039 - .236) grip must exceed door thickness range by 4 (.157) for assembled installation
When sealing option is selected add 0.4 (.02) to grip calculation to accommodate sealing washer

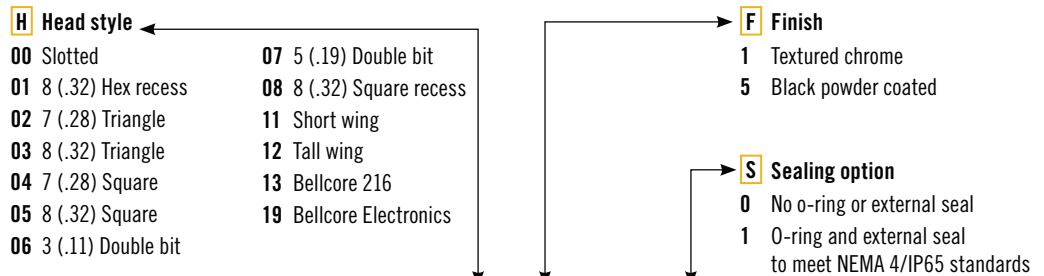

- D Door thickness range**
- 1 1 - 6 (.039 - .236) (short housing supplied)
 - 2 1 - 14 (.039 - .551) (long housing supplied)

G Grip table											
G	Grip		G	Grip		G	Grip		G	Grip	
	Short housing	Long housing		Short housing	Long housing		Short housing	Long housing		Short housing	Long housing
00	Do not use	6 (.24)	05	8 (.31)	16 (.63)	10	18 (.71)	26 (1.02)	15	28 (1.10)	36 (1.42)
01	Do not use	8 (.31)	06	10 (.39)	18 (.71)	11	20 (.79)	28 (1.10)	16	30 (1.18)	38 (1.50)
02	2 (.08)	10 (.39)	07	12 (.47)	20 (.79)	12	22 (.87)	30 (1.18)	17	32 (1.25)	40 (1.57)
03	4 (.16)	12 (.47)	08	14 (.55)	22 (.87)	13	24 (.94)	32 (1.25)	18	34 (1.34)	42 (1.65)
04	6 (.24)	14 (.55)	09	16 (.63)	24 (.94)	14	26 (1.02)	34 (1.34)	19	36 (1.42)	44 (1.73)

If grip falls between two choices, use the smaller option

Dimensions in millimeters (inch) unless otherwise stated