



# E5 Cam Latch

## Zinc · Cylinder lock · Fixed grip



### Cylinder Lock

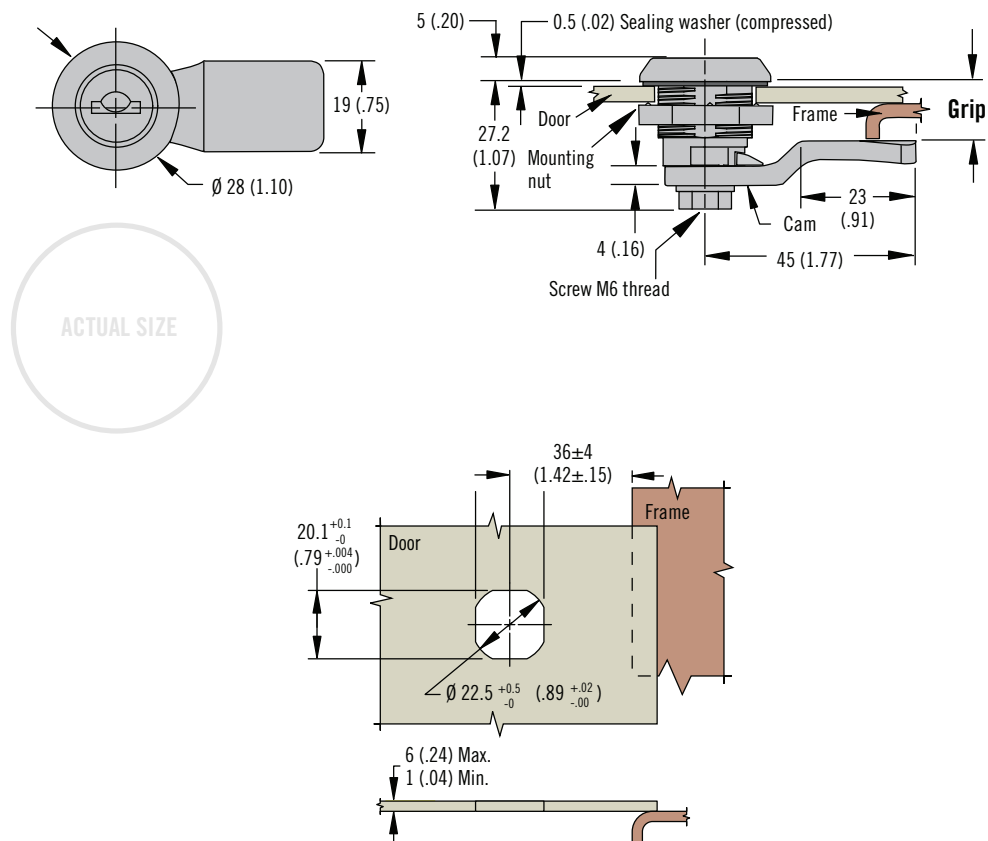

- Single hole install
- Latched / unlatched indicator

### Material and Finish

Zinc alloy, powder coated and steel, zinc plated  
Scalp stainless steel

### Performance Details

Max. static load: 330 N (74 lbf)

### Installation Notes

Mounting nut max. tightening torque: 10 N·m (88 in·lbf)

Screw Max. tightening torque: 5 N·m (45 in·lbf)

### Sealing Notes

NEMA 4 / IP65 achieved using gasket supplied

### Keys and Accessories

See pages 98 - 101

### Notes

Suitable for push-to-close action  
see pages 96 - 97

### Part Number Selection

Order latch and cam separately

- F** Finish  
 2 Bright Chrome  
 5 Black powder coated
- K** Key options CH751  
 0 No keys supplied (order separately)  
 2 2 Flat keys supplied

Latch Part Number  
(no cam)

**E5 - 5 - 40 F - UU1 - 1 K**

Cam Part Number Table (order separately from latch)

Grip	Part Number	Grip	Part Number	Grip	Part Number	Grip	Part Number
4 (.16)	E5-6003	14 (.55)	E5-6008	24 (.94)	E5-6013	34 (1.34)	E5-6018
6 (.24)	E5-6004	16 (.63)	E5-6009	26 (1.02)	E5-6014	36 (1.42)	E5-6019
8 (.31)	E5-6005	18 (.71)	E5-6010	28 (1.10)	E5-6015	38 (1.50)	E5-6020
10 (.39)	E5-6006	20 (.79)	E5-6011	30 (1.18)	E5-6016	40 (1.57)	E5-6021
12 (.47)	E5-6007	22 (.87)	E5-6012	32 (1.25)	E5-6017	42 (1.65)	E5-6022

If grip falls between two choices, use the smaller option

Dimensions in millimeters (inch) unless otherwise stated

