


# E5 Cam Latch

Zinc · Tool operated · Fixed grip

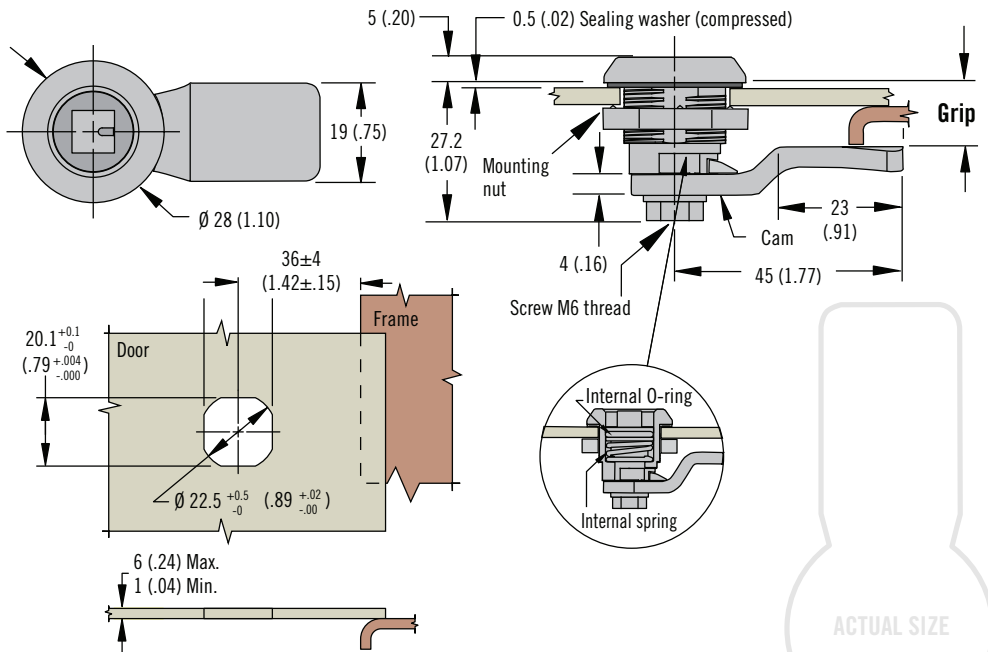

- Single hole install
- Latched / unlatched indicator

### Material and Finish

Zinc alloy, powder coated or chrome plated and steel, zinc plated

### Performance Details

Max. static load: 330 N (74 lbf)

### Installation Notes

Mounting nut:  
Max. tightening torque:  
10 N·m (88 in·lbf)

Screw Max. tightening torque:  
5 N·m (45 in·lbf)

### Sealing Notes

NEMA 4 / IP65 achieved using gasket supplied

### Keys and Accessories

See pages 98 - 101


### Notes

Suitable for push-to-close action  
see pages 96 - 97

### Part Number Selection

Order latch and cam separately

### H Head Styles

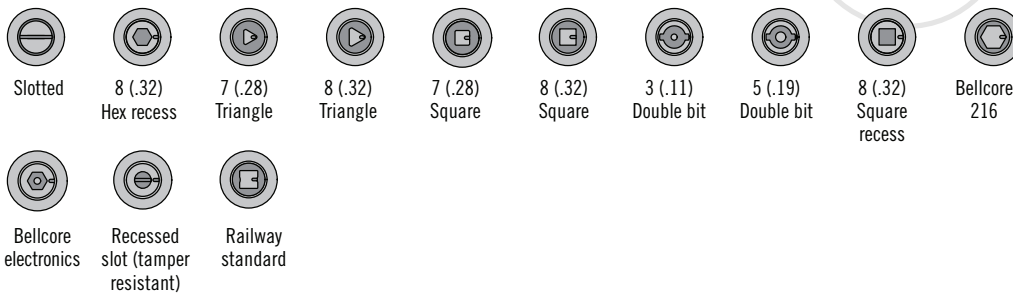

Latch Part Number (no cam)

**E5 - 6 - H F - UU1**

- F Finish**
- 2 Bright chrome
  - 5 Black powder coated

**H Head style**

- 00 Slotted
- 01 8 (.32) Hex recess
- 02 7 (.28) Triangle
- 03 8 (.32) Triangle
- 04 7 (.28) Square
- 05 8 (.32) Square

- 06 3 (.11) Double bit
- 07 5 (.19) Double bit
- 08 8 (.32) Square recess
- 13 Bellcore 216
- 19 Bellcore electronics
- 21 Recessed slot (tamper resistant)
- 22 Railway standard

Cam Part Number Table (order separately from latch)

Grip +2(.08) -0(.00)	Part Number	Grip +2(.08) -0(.00)	Part Number	Grip +2(.08) -0(.00)	Part Number	Grip +2(.08) -0(.00)	Part Number
4 (.16)	E5-6003	14 (.55)	E5-6008	24 (.94)	E5-6013	34 (1.34)	E5-6018
6 (.24)	E5-6004	16 (.63)	E5-6009	26 (1.02)	E5-6014	36 (1.42)	E5-6019
8 (.31)	E5-6005	18 (.71)	E5-6010	28 (1.10)	E5-6015	38 (1.50)	E5-6020
10 (.39)	E5-6006	20 (.79)	E5-6011	30 (1.18)	E5-6016	40 (1.57)	E5-6021
12 (.47)	E5-6007	22 (.87)	E5-6012	32 (1.25)	E5-6017	42 (1.65)	E5-6022

