



K5 Draw Latch

Rotary · Large

- Lift and Turn operation
- Consistent pull-up

Material and Finish

Stainless steel or steel, zinc plated


Installation Notes

Install assembly with Ø 5 (3/16) rivets or M5 (No. 10) screws (not supplied)


Notes

Spring loaded and low profile: Ideal for applications where shock and vibration occur. Compensates up to 4 (.16) for mounting hole irregularities, panel variations and gasket set.


Riveted (hex cam shown)

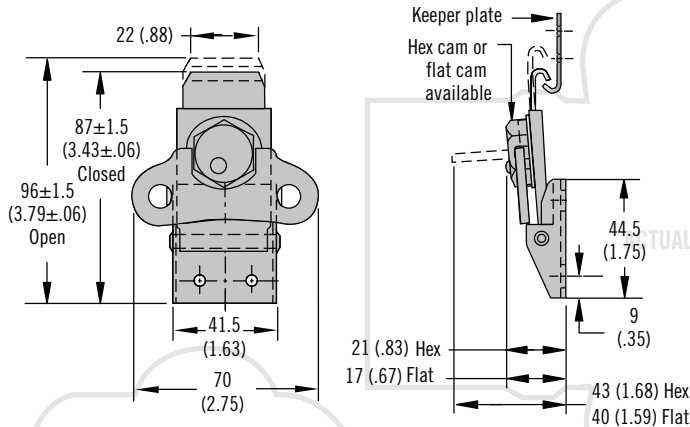

Low Profile (flat cam shown)

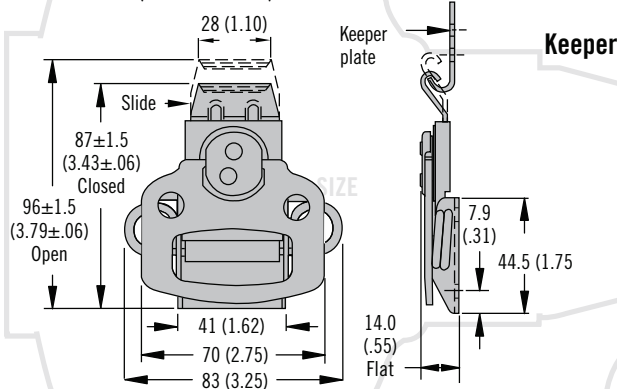

Spring Loaded (flat cam shown)

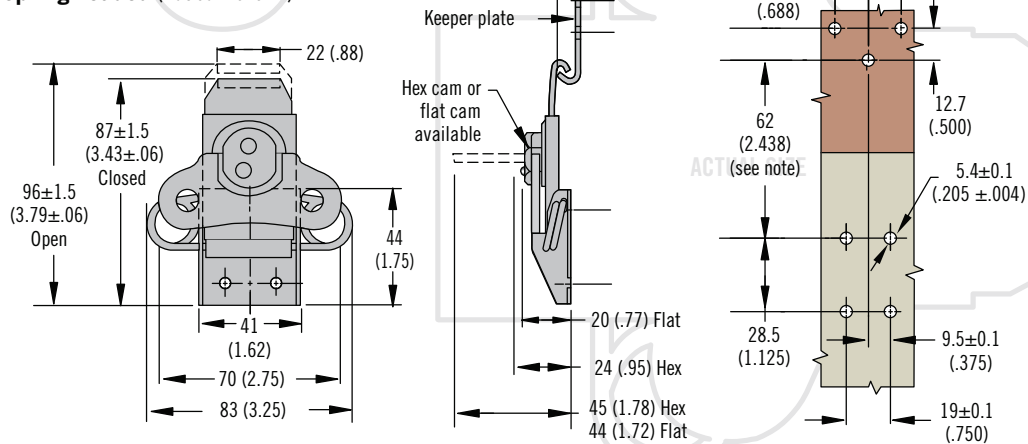

Part Number

See table

Order latch and keeper separately

Material	Part Number					
	Riveted Hex Cam	Riveted Flat Cam	Low Profile Flat Cam	Spring Loaded Hex Cam	Spring Loaded Flat Cam	Keeper
Steel	K5-2812-07	K5-2857-07	K5-2814-07	K5-2858-07	K5-2856-07	K5-2811-07
Stainless Steel	~	K5-2857-52	~	~	K5-2856-52	K5-2811-52

Dimensions in millimeters (inch) unless otherwise stated


K5 Draw Latch

Rotary · Large




227


Padlockable (riveted hex cam shown)

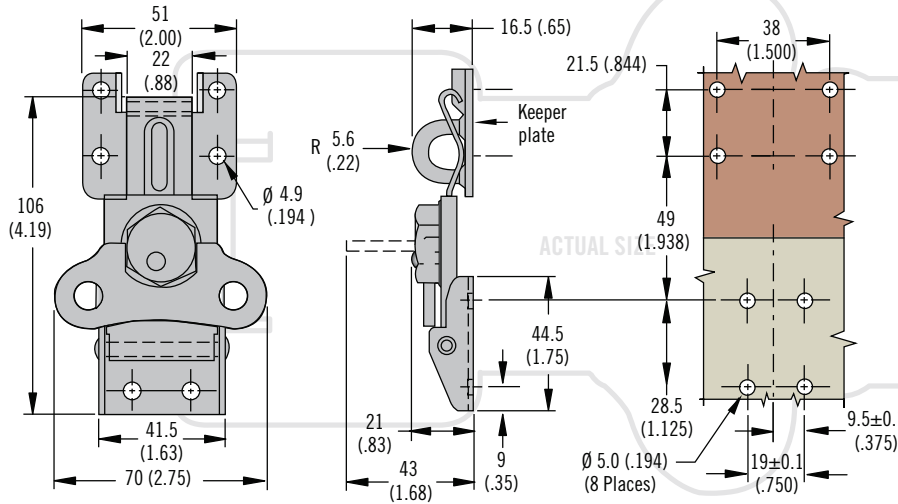


Key Lockable

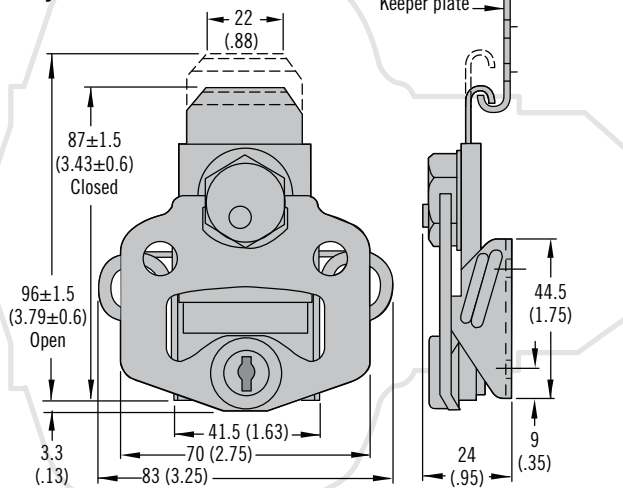

Keeper

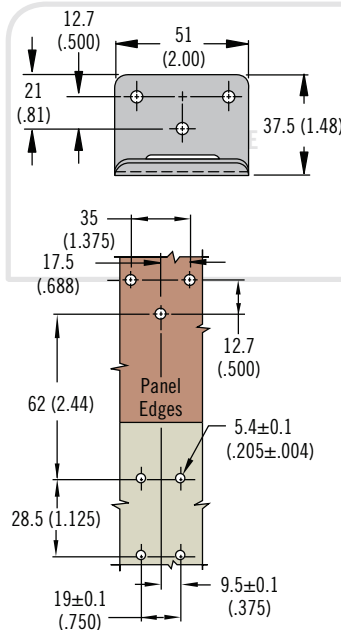

Tool Operated (spring loaded shown)

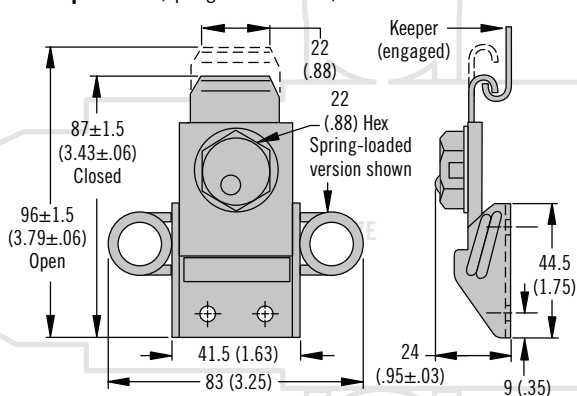

Latch Part Number	
Padlockable Riveted Hex Cam	K5-2754-07
Padlockable Riveted Flat Cam	K5-1993-07
Padlockable Flat Cam, Spring Loaded	K5-1994-07
Key Lockable	K5-2813-07
Tool Operated, Spring Loaded	K5-2819-07
Tool Operated, Riveted	K5-2818-07
Keeper Part Number	
Keeper	K5-2811-07
Keeper, Padlockable	K5-1736-07

- Lift and Turn operation
- Consistent pull-up

Material and Finish

Steel, zinc plated

Installation Notes

Install assembly with $\varnothing 5$ (3/16) rivets or M5 (No. 10) flat head screws (not supplied)

Notes

Spring loaded:

Ideal for applications where shock and vibration occur. Compensates up to 4 (.16) for mounting hole irregularities, panel variations and gasket set.

Part Number

See table


Order latch and keeper separately

Southco® Draw Latches

Link Lock Rotary Action Draw Latch, Folding Blade Extensions


- Blade swings open when unlatched
- Latch can be recessed into a panel
- Accommodates off-plane latching

Series S-2000

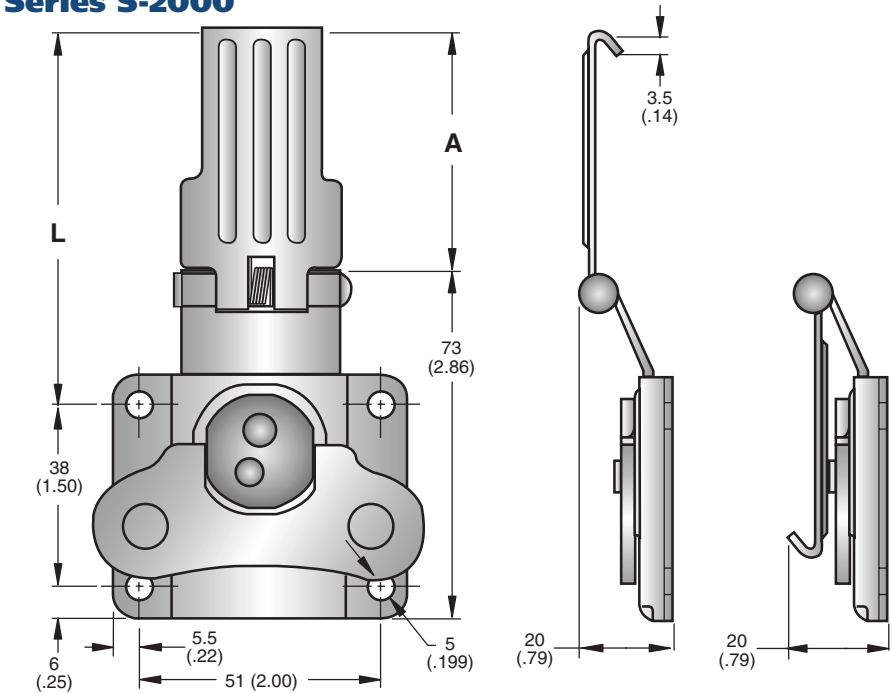

DIMENSIONS		PART NUMBERS
A	L	
51 (2.00)	79 (3.11)	K5-1974-07 •
63 (2.47)	91 (3.58)	K5-2200-07 •
67 (2.63)	95 (3.74)	K5-2207-07 •
70 (2.75)	98 (3.86)	K5-2242-07 •
76 (3.00)	104 (4.11)	K5-2216-07 •

Series S-3000

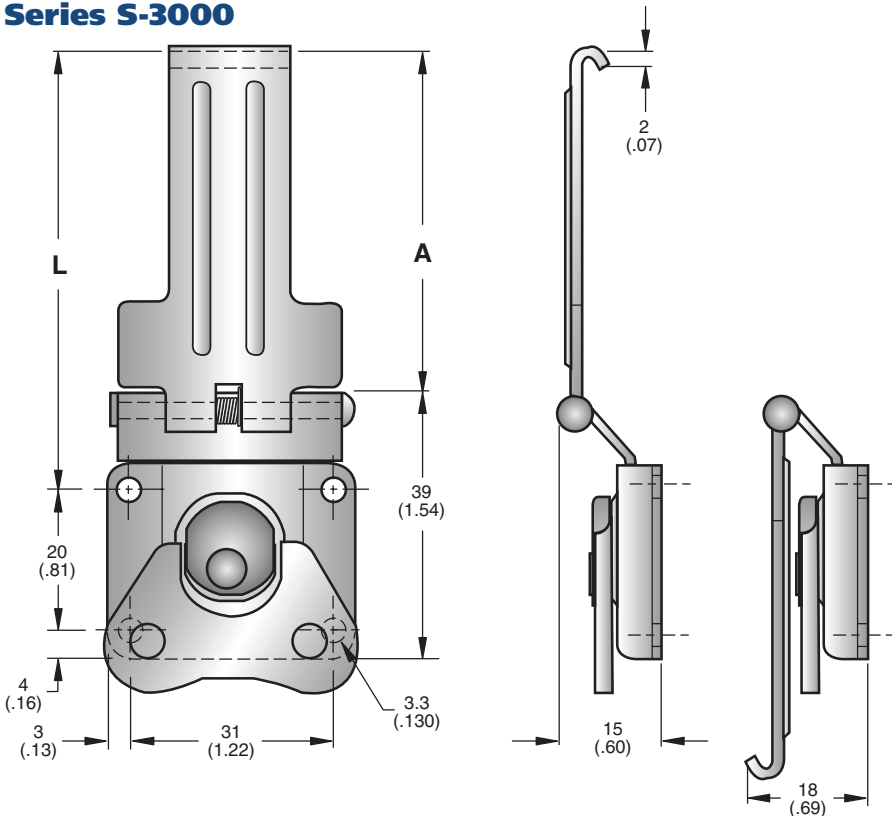

DIMENSIONS		PART NUMBERS
A	L	
54 (2.13)	69 (2.70)	K3-2436-07 •
67 (2.63)	81 (3.20)	K3-2468-07 •

Material and Finish

HOUSING, SLIDE and BLADE
EXTENSION: Hardened alloy steel,
zinc plated plus bright chromate dip.
CAP, CAM RIVET and SPRINGS: 300
Series stainless steel.
UPPER CAM (S-2000): 300 Series
stainless steel.
UPPER CAM: (S-3000): Carbon steel;
zinc plated plus bright chromate dip.

millimeter (inch)
millimeter
(inch)

Dimensions without tolerances are for reference only.

* S-2000 and S-3000 latches can be used with Large, Medium or Miniature Keeper plates.

southco

• Products identified with this symbol are stocked subject to prior sale in one or more of our global locations. If unavailable from our facility nearest you, allow for shipping time from another facility.