



N5 Sealed Compression Latch

Lift & Turn Series · Folding T-Handle · Adjustable grip

- Flush profile when latched
- Non-locking and key-locking options
- Intuitive universal operation

Material and Finish

Cup: Plastic, black
Handle: Zinc alloy, powder coated or chrome plated

Performance Details

Compression: 4.0 mm (.16 in)
Maximum static load: 1000 N (225 lbf)

Sealing Notes

NEMA 4 / IP65 sealing compliant

Installation Notes

Recommended tightening torque for the mounting nut is 1.5 N·m (13 in·lbf).




Keys

See page 121


Notes

For lock core selection and a complete overview of the *SOUTHCO*® Key-Choice System see page 190

Standard Locking Cup Shown

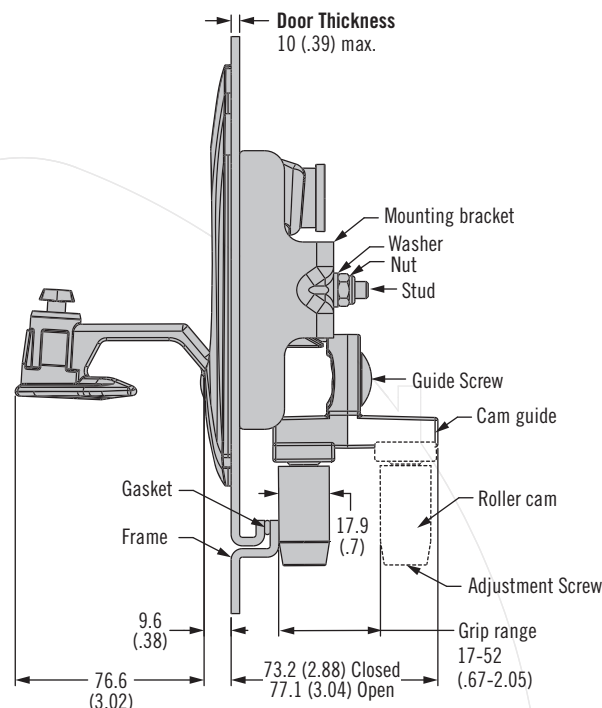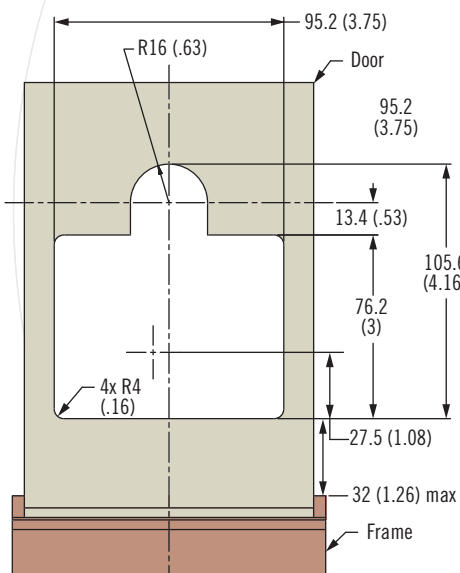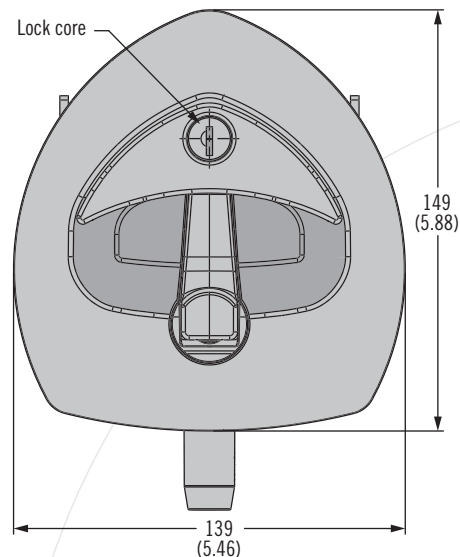

ACTUAL SIZE

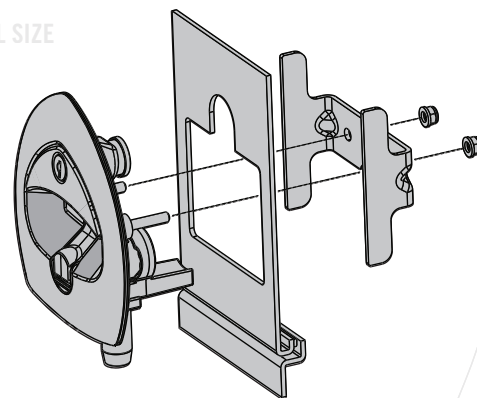

Part Number Selection

N5 - A0 HH 0A - A M

HH Head Styles

M Handle Finish

1 Zinc, Chrome Plated
5 Zinc, Black Powder Coat

00	01	11	12	13	21	22	23	24
Non-Locking	Locking without lock core	Key Locking (CH751)	Key Locking (RS001)	Key Locking (HD)	No. 2 Phillips recess	Slotted recess	4 (.16) Hex recess	8 (.32) Hex recess