



# P8 Grab Handle

## Surface mount


- Two styles and color options available
- Concealed installation
- Four standard lengths

### Material and Finish

Aluminum, anodized, clear or black

### Performance Details

Max. working load: 1500 N (335 lbf)



### Installation Notes

Screws not supplied.

Calculate screw length using the following formula:

Door thickness + 5 (.20)

Max. tightening torque of mounting screws: 1.7 N·m (15 in·lbf)

### Part Number Selection


For visual identification:

M4 products have a counterbored hole.

8-32 products have a countersink hole

### Part Number

Oval profile handles are currently offered in a 10-32 thread only.

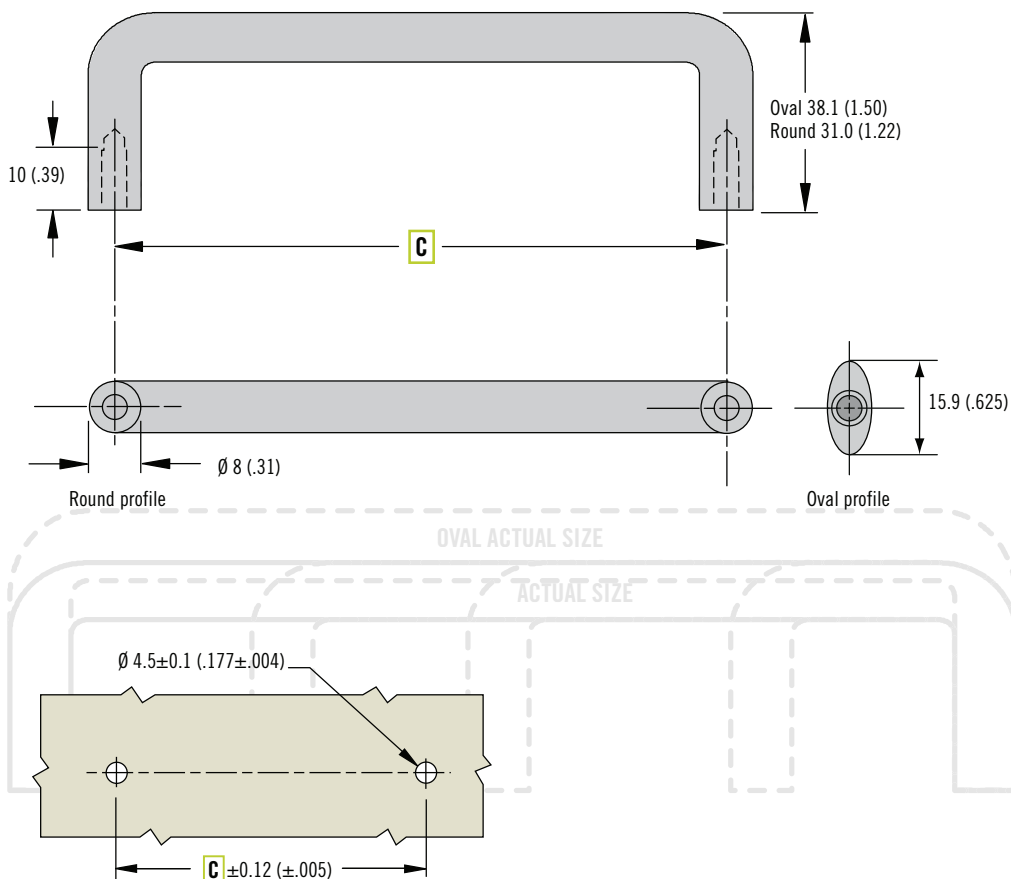

### Round Profile

**P8 - C - 31 - T - 1 F - P**

- C** Centers
- 030** 30 (1.18) Hole centers
  - 064** 64 (2.52) Hole centers
  - 096** 96 (3.78) Hole centers
  - 128** 128 (5.04) Hole centers

- T** Tapped mounting hole
- 08** Imperial 8-32
  - M4** Metric M4 x 0.7

- P** Packing option
- Omit for individual packaging (1 per bag)
  - 3** Layer packaging contact Southco
- F** Finish
- 1** Clear anodized
  - 5** Black anodized

### Oval Profile

Finish	Part Number		C
	Bulk Packaged	Individually Packaged (1 per bag)	
Clear anodized	P8-128-38-10V-11-3	P8-128-38-10V-11	128 (5.04)
Black anodized	P8-128-38-10V-15-3	P8-128-38-10V-15	

Dimensions in millimeters (inch) unless otherwise stated