
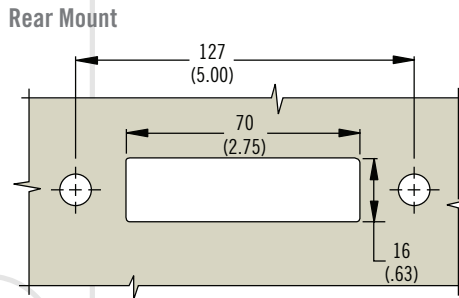
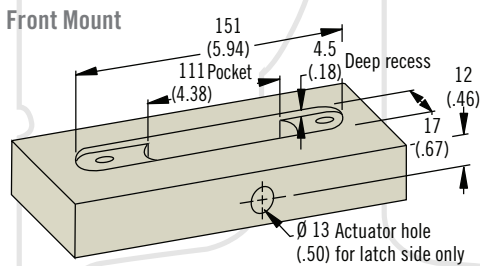



R2 Draw Latch

Concealed · Front mount

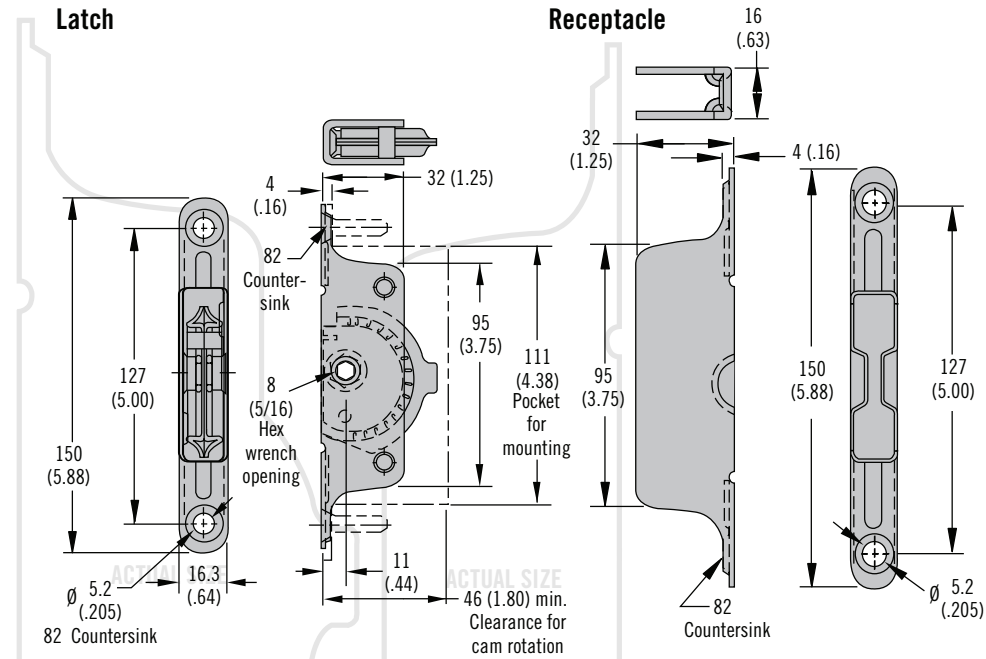


Accessories

Actuation Tool



Hole Plugs

Optional hole plugs to conceal actuator access hole are available for a 13 (.50) diameter hole

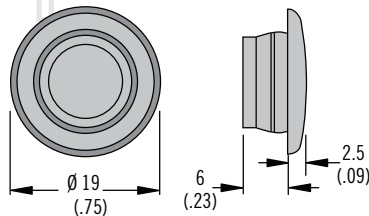

- High tensile load
- Adjustable pull-up
- Front mount installation

Material and Finish

Steel, zinc plated

Performance Details

Average ultimate tensile load:
4000 N (900 lbf)

Installation Notes:

Wood application:

Install assembly with M5 (No. 10) flat head screws (not supplied).

Note: Latch strength is dependant on mounting hardware and installation material

Metal application:

Install assembly with 5 (.196) flathead rivets or M5 (No. 10) screws. Note: Max. metal panel thickness should be 2.5 (.10)

Accessories

Actuation tool


Part number: 29-0059-02

Hole plugs

Part number:

White: T5-7075-000

Black: T5-7075-028

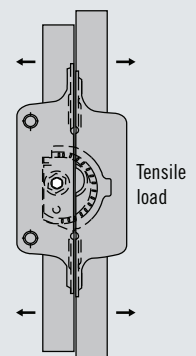

Part Number

See table

Order latch and keeper separately

Part Number	
Latch	R2-0267-02
Receptacle	R2-0268-02