


R4-82 Rotary Paddle Latch

Pull-to-open



307

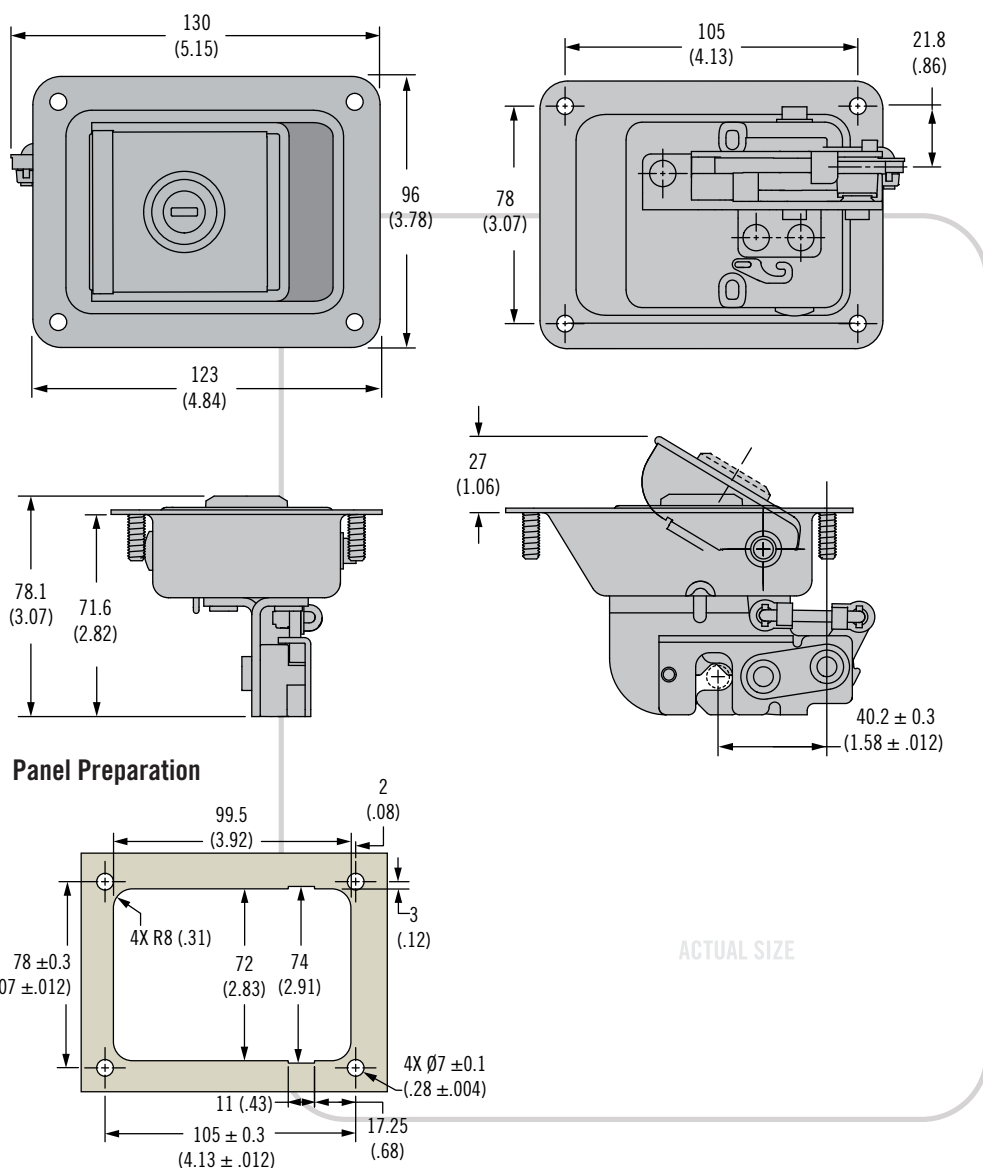

- Direct actuation, no cable or rod required
- Single or two stage latching
- Integrated bumper
- Thru hole or stud mounting options

Material and Finish

Cup and handle: Steel, zinc plated or black powder coat

Lock slide, latch frame, pawl, trigger: Steel, zinc plated

Installation Notes

Thru hole: M5 or #8 screws recommended

Studs: Use M6 mounting nuts (max tightening torque 7 N·m (62 in·lbf))

Studs: Max panel thickness 10 (.39)

Accessories

Striker bolt see page 297

Notes

For lock core selection and a complete overview of the *SOUTHCO*® Key-Choice System see page 190

Part Number Selection

See table

S Stage

6 Single Stage with Integrated Bumper

8 Two Stage with Integrated Bumper

L Locking Options

1 Reversible Key (No Keys - R001)

2 Reversible Key (2 Keys included - R001)

3 Reversible Key (Keyed differently - 2 keys included)

4 Standard Key (No keys - CH751)

5 Standard Key (2 Keys included - CH751)

6 Standard Key (Keyed differently - 2 keys included)

7 Reversible Key (2 keys included - 14603)

9 No Lock Plug installed (See notes for more information)

H Housing

2 Rivet Thru Hole 5.2 (.20)

4 Press-in Studs

PP Finish

10 Zinc plated

50 Black powder coated

KC Key Codes

(Omit for Locking Options 1, 2, 4, 5 and 9)

***KD10** Keyed Differently (Only used if **L** =3 or 6)

***MK10** Master Keyed Differently (Only used if **L** =6)

*Supplied in multiples of 10 with 10 different key codes.

R4 - 82 - S L H - PP - KC

southco®

Dimensions in millimeters (inch) unless otherwise stated

www.southco.com/AC