


REVISION HISTORY			
REV	DATE	BY	DESCRIPTION
C	16APR2026	ASC/VK	PRN: P2026-0653

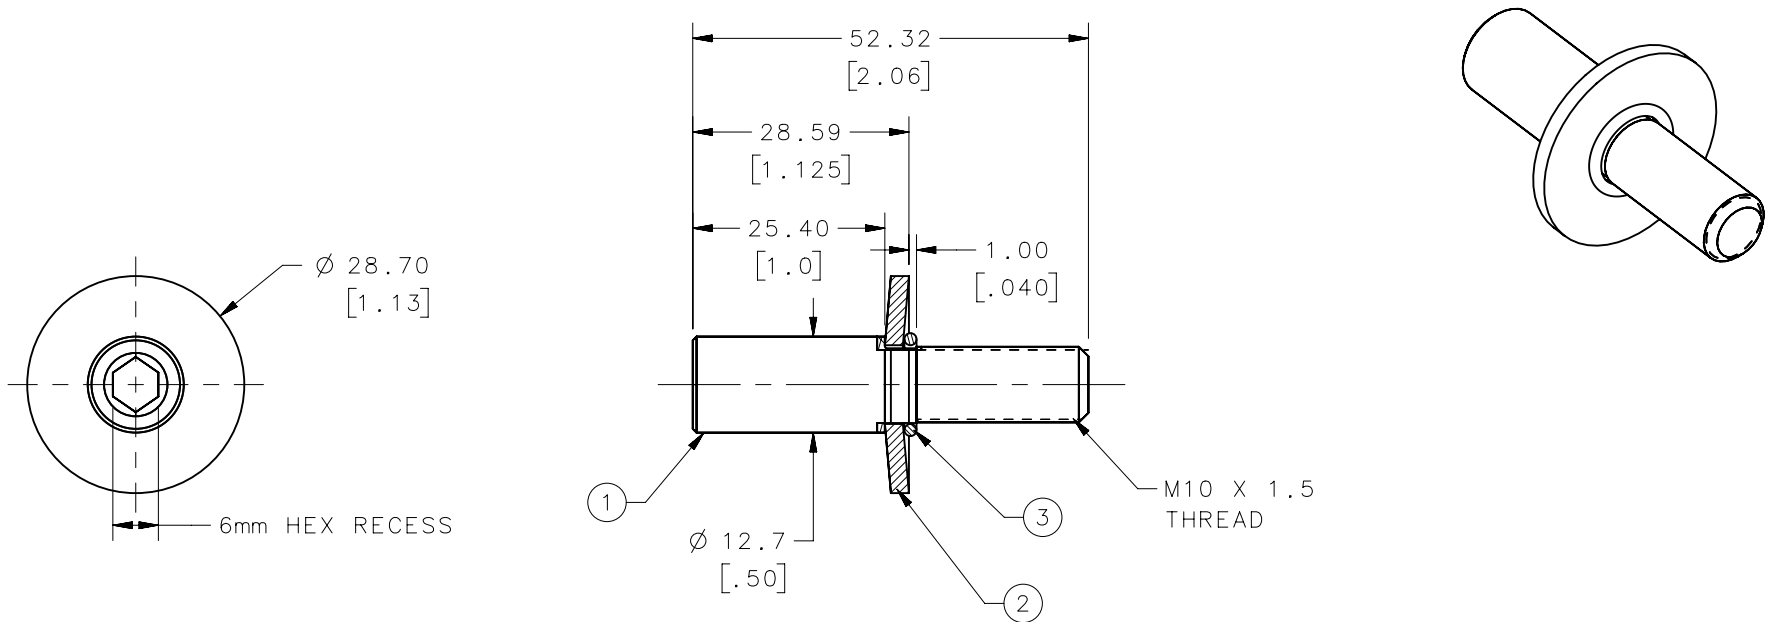

3	-	1	O-RING	70 DUROMETER BUNA N	NATURAL	STAINLESS STEEL BOLT
2	-	1	WASHER	STAINLESS STEEL	ANNEALED	
1	-	1	BOLT	STAINLESS STEEL	ANNEALED	
-	R4-90-324-20	-	STRIKER BOLT ASSEMBLY	-	-	
3	-	1	O-RING	70 DUROMETER BUNA N	NATURAL	STEEL BOLT
2	-	1	WASHER	STAINLESS STEEL	ANNEALED	
1	-	1	BOLT	STEEL	ZINC BRIGHT CHROMATE	
-	R4-90-324-10	-	STRIKER BOLT ASSEMBLY	-	-	
NO.	PART NUMBER	QTY	TYPE OF COMPONENT	MATERIAL	FINISH	GENERAL NOTES

THIRD ANGLE PROJECTION MILLIMETERS [IN] TOLERANCES UNLESS OTHERWISE NOTED ALL DIMENSIONS WITHOUT TOLERANCES ARE FOR REFERENCE ONLY. PER ASME Y14.5M-2009			southco® CONNECT • CREATE • INNOVATE R4 STRIKER BOLT ASSEMBLY		
PROPRIETARY ITEM EXCEPT FOR USES EXPRESSLY GRANTED IN WRITING, INFORMATION DISCLOSED HEREON IS CONFIDENTIAL AND ALL RIGHTS, PATENT AND OTHERWISE, ARE RESERVED BY SOUTHCO, INC.			SIZE	SYSTEM	DWG NO.
			A4	NX	J-R4-90-324
			DRAWN BY	DATE	SCALE
			ASC	26SEP2026	1:1
			SHEET 1 OF 1		

- NOTES:
- TO BE USED WITH SOUTHCO STANDARD R4-30 LATCH SERIES.
 - MOUNTING TORQUE FOR STRIKER INSTALLATION SHOULD BE 25-30 Nm.