



R5 Draw Latch

Concealed · Mortise Mount

- High tensile load
- Consistent pull-up
- Concealed installation

Material and Finish

Steel, zinc galvanized

Performance Details

Average ultimate tensile load:
11,100 N (2500 lbf)

Average ultimate shear load:
68,180 N (15,327 lbf)

Installation Notes

Install assembly with $\varnothing 6$ (1/4) rivets or M6 (1/4) screws (not supplied)

Accessories

Actuation tool


Part number: 29-0059-02

Notes

Operating force

To open: 4 N·m (35 in·lbf)

To close: 4 N·m (35 in·lbf)

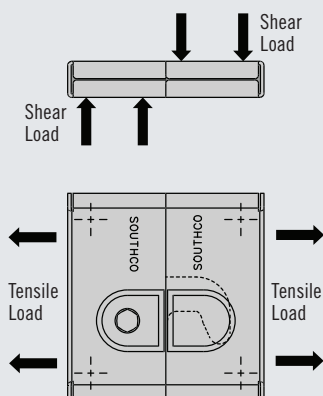


Part Number


See table

Order latch and
receptacle separately

Latch

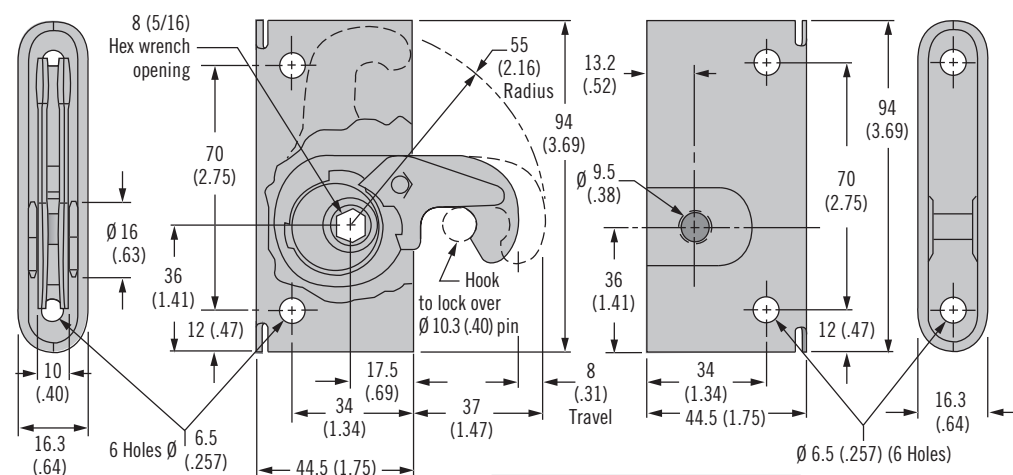


Recessed Pocket

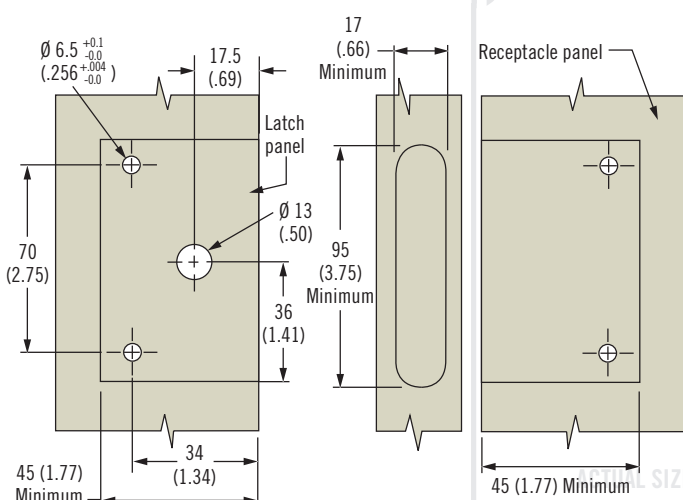


Accessories

Actuation Tool



Side Mount



Part Number	
Latch	Receptacle
R5-0074-17	R5-0079-17