

# TL Draw Latch

Over-center · Small · Wire bail

- Compact latch
- Multiple link options for application variances

### Material and Finish

Stainless steel, steel, zinc plated or steel, black E-coat

### Performance Details

Steel working load:

Compact heavy-duty:

1290 N (290 lbf)

Compact: 220 N (45 lbf)

Stainless steel working load:

Compact heavy-duty:

800 N (180 lbf)

Compact: 220 N (45 lbf)


### Installation Notes

Install assembly with M4 (No. 6) round head screws (not supplied) or 4 (.156) rivets


### Notes

Order keepers separately, see page 210


### Exposed Mounting Holes

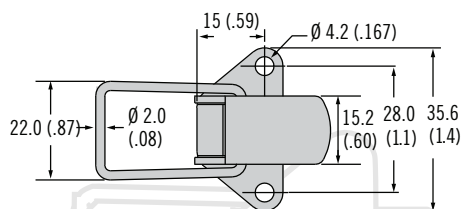


### Heavy-Duty

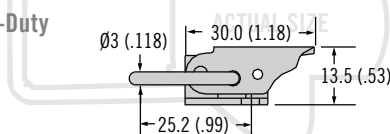


### Flat Wire Link




### Short Curved Wire Link




### Long Curved Wire Link




### Shallow Hook Link




### Deep Hook Link




### Concealed Mounting Holes

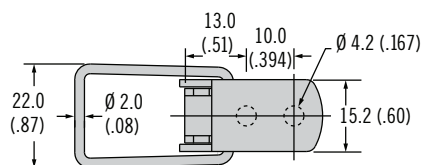


### Flat Wire Link




### Short Curved Wire Link




### Long Curved Wire Link



### Shallow Hook Link



### Deep Hook Link



### Part Number Selection

Latch only

See page 210 for keepers

#### L Link style

- 1 Flat
- 2 Short curved
- 3 Long curved
- 4 Shallow hook
- 5 Deep hook
- 6 Heavy-duty (Steel & 300 stainless steel model only)

#### F Finish

- 07 Steel, zinc plated
- 13 Black E-coat
- 24 316 stainless steel electropolished
- 52 300 stainless steel passivated

**TL - 20 - B 0 L - F**

#### B Base type

- 1 Exposed
- 2 Concealed

Dimensions in millimeters (inch) unless otherwise stated



[www.southco.com/TL](http://www.southco.com/TL)