


TL Draw Latch


Over-center · Medium · Wire bail




Exposed Mounting Holes

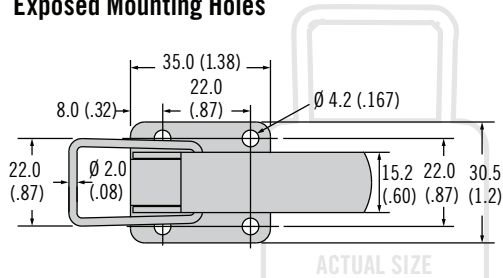


Flat Wire Link

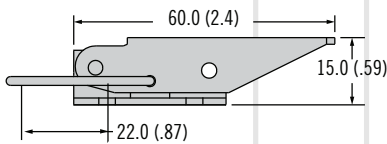


Curved Wire Link

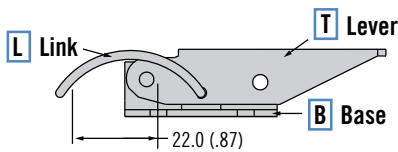


Shallow Hook Link




Deep Hook Link

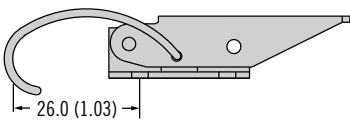


Concealed Mounting Holes

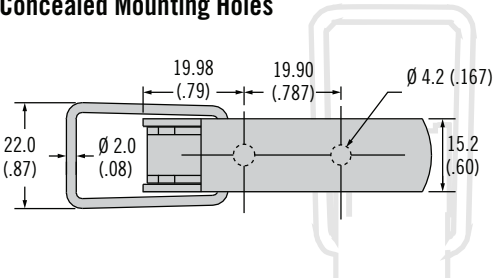


Flat Wire Link

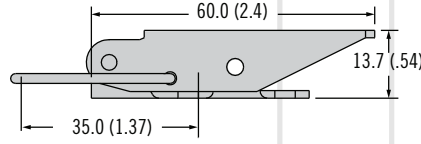


Curved Wire Link



Shallow Hook Link

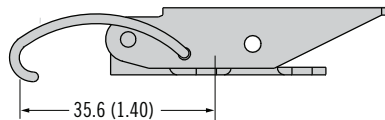

Deep Hook Link

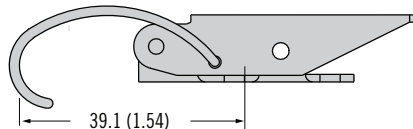

- Multiple link options for application variances
- Secondary locking style available

Material and Finish

Stainless steel or steel, zinc plated or steel, black E-coat

Performance Details

Steel:

Working load: 220 N (45 lbf)

Stainless Steel:

Working load: 220 N (45 lbf)

Installation Notes

Install assembly with M4 (No. 6) round head screws (not supplied) or 4 (.156) rivets

Notes

Order keepers separately, see page 210

Part Number Selection

Latch only

See page 210 for keepers

