
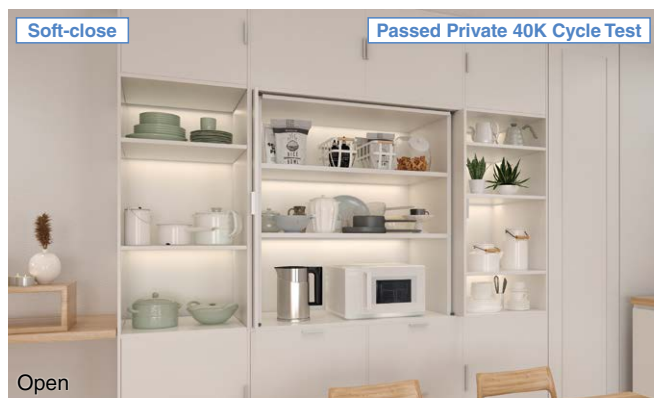


LAMP. POCKET DOOR SYSTEM ALT-ST15-D360 Inset / Soft Close NEW

Latest
Info


Easy Door Alignment Adjustment

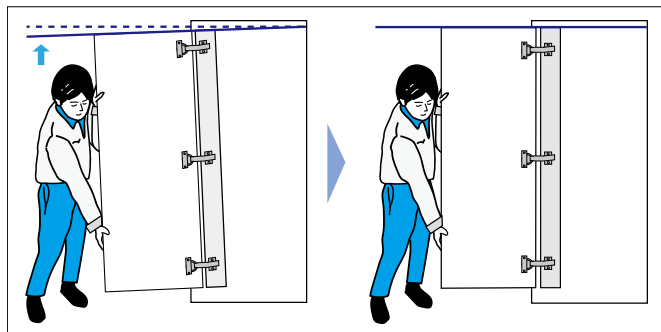


When installing, you can adjust the hanging angle just by lifting up the door.

Installation Example

Details about parts: P.447 - 449

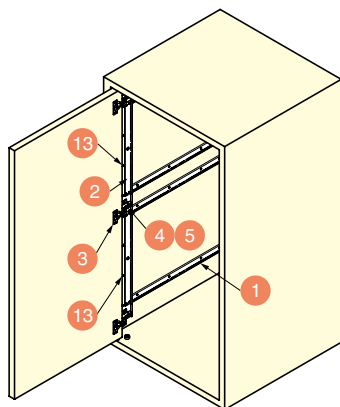

Door cutout dimensions



Size Type	ALT-ST15-D360S S (2 slides)	ALT-ST15-D360M M (2 slides)	ALT-ST15-D360L L (4 slides)	ALT-ST15-D360LL LL (4 slides)
Width	Max. 600 mm			
Height	500-700 mm	700-900 mm	900-1200 mm	1200-1600 mm
Thickness	18-30 mm			
Weight	Max. 9 kg		Max. 15 kg	

Inset pocket door system with door alignment adjustability.

- The sliding system allows doors to retract inside cabinets. Doors will not occupy space, providing full access to inside of cabinets.
- The hanging angle of the door can be easily adjusted. When installing, the door can be lifted upward into 5 different angles.
- The fittings allow the door to retract further into the cabinet than the ALT-ST20-D360 (P.454).
- The door closes slowly and quietly.
- The damper hinges can be replaced with hinges with catch function.

INSTRUCTION

SCREW


Remarks

- For best performance, precise mortising is required.
- Do not cut slides.
- Do not close doors until they are fully slid out and the catch has activated.
- Install a door stopper (not provided) on the door leading edge of the door.



Pocket Door


Installation

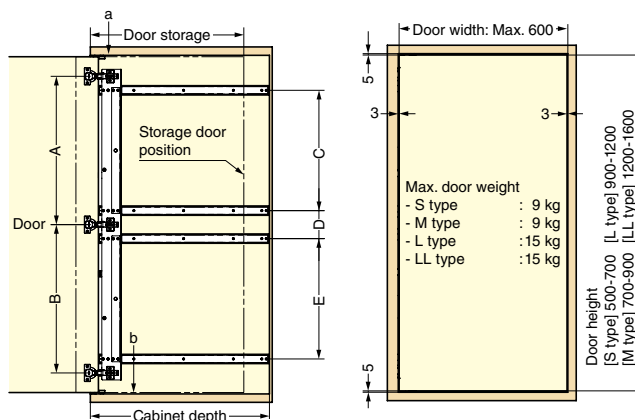

Type	Hinge Pitch		Slide Pitch		
	A	B	C	D	E
S	360	—	260	—	—
M	560	—	460	—	—
L	380	380	260	140	260
LL	530	530	430	100	430

Slide Part Name	Door Storage Amount	Min. Cabinet Depth	Number of Slides			
			S	M	L	LL
AL80C-15	291 + Thickness	387 + Thickness	2	2	4	4
AL80C-16	316 + Thickness	412 + Thickness				
AL80C-17	341 + Thickness	437 + Thickness				
AL80C-19	392 + Thickness	488 + Thickness				
AL80C-21	443 + Thickness	539 + Thickness				
AL80C-22	468 + Thickness	564 + Thickness				
AL80C-24	519 + Thickness	615 + Thickness				
AL80C-26	570 + Thickness	666 + Thickness				
AL80C-28	621 + Thickness	717 + Thickness				

Check the door spec and select "Synchronized panel" and "Part kit".



Type	Door Spec*	No.	Parts	Item Code	Item Name	Qty/Door
S	Height : 500-700 mm Weight : Max. 9 kg	②	Synchronized panel	180-050-419	ALT-ST15-S	1 each
		③ ~ ⑬	Part kit	180-055-056	ALT-ST15-D360SM-KIT	
M	Height : 700-900 mm Weight : Max. 9 kg	②	Synchronized panel	180-050-420	ALT-ST15-M	1 each
		③ ~ ⑬	Part kit	180-055-056	ALT-ST15-D360SM-KIT	
L	Height : 900-1200 mm Weight : Max. 15 kg	②	Synchronized panel	180-050-421	ALT-ST15-L	1 each
		③ ~ ⑬	Part kit	180-055-057	ALT-ST15-D360LLL-KIT	
LL	Height :1200-1600 mm Weight : Max. 15 kg	②	Synchronized panel	180-050-422	ALT-ST15-LL	1 each
		③ ~ ⑬	Part kit	180-055-057	ALT-ST15-D360LLL-KIT	

The part kit includes multiple parts. For details, see P.449.

Check the cabinet depth and select a slide. The required quantity depends on the size types.




*DT= Door Thickness


The required quantity per door depends on the size types.

Mounting Positions

Cross section a: Slide/hinge mounting

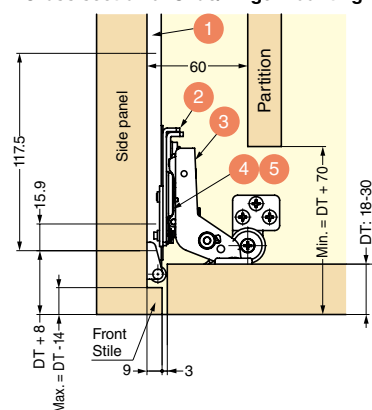


Cross section b: For roller bracket mounting

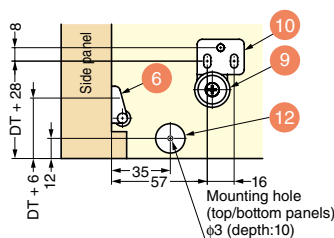

*DT= Door Thickness

Cross section b: For mounting with female screw

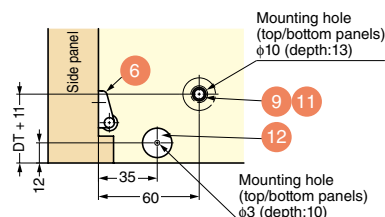

To hide the metal fittings, install a partition (not included).
(An attachable/detachable partition is recommended for easier maintenance.)