


E clips

DIN 6799 / D1500 / RA

										
d ₂	Part Number	d ₁		s	Tolerance	d ₄	a	Tolerance	C ₂	Weight
		from	to							[kg / 1000]
1.2	RA1.2	1.4	2.0	0.30	±0.02	2.90	1.01	±0.04	3.0	0.009
1.5	RA1.5	2.0	2.5	0.40		3.90	1.28		4.0	0.021
1.9	RA1.9	2.5	3.0	0.50		4.40	1.61		4.5	0.040
2.3	RA2.3	3.0	4.0	0.60		5.90	1.94		6.0	0.069
3.2	RA3.2	4.0	5.0	0.60		6.90	2.70		7.0	0.088
4.0	RA4.0	5.0	7.0	0.70		8.85	3.34	±0.048	9.0	0.158
5.0	RA5.0	6.0	8.0	0.70		10.85	4.11		11.0	0.236
6.0	RA6.0	7.0	9.0	0.70		11.80	5.26	±0.058	12.0	0.255
7.0	RA7.0	8.0	11.0	0.90		13.80	5.84		14.0	0.474
8.0	RA8.0	9.0	12.0	1.00	±0.03	15.75	6.52		16.0	0.660
9.0	RA9.0	10.0	14.0	1.10		18.20	7.63		18.5	1.000
10.0	RA10.0	11.0	15.0	1.20		19.70	8.32		20.0	1.120
12.0	RA12.0	13.0	18.0	1.30		22.70	10.45	±0.070	23.0	1.770
15.0	RA15.0	16.0	24.0	1.50		28.70	12.61		29.0	3.370
19.0	RA19.0	20.0	31.0	1.75		36.50	15.92	±0.084	37.0	6.420
24.0	RA24.0	25.0	38.0	2.00		43.50	21.88		44.0	8.550

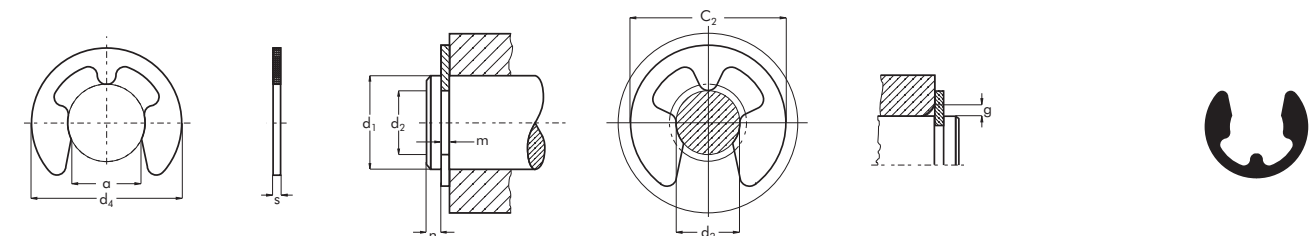

The technical specifications contained in this brochure are approximate and no guarantee is given as to their accuracy. Designs are subject to change.

DIN 6799 / D1500 / RA

Part Number	d_2	Tolerance	DATA							
				n	FN	d_1	FR	g	FRg	$n_{det.}$ x1000 [rpm]
			m min.		[kN]		[kN]		[kN]	
RA1.2	1.2	-0.060	0.34	0.6	0.04	1.5	0.12	0.4	0.06	47
RA1.5	1.5		0.44	0.8	0.07	2.0	0.22	0.6	0.11	42
RA1.9	1.9		0.54	1.0	0.10	2.5	0.35	0.7	0.17	40
RA2.3	2.3		0.64	1.0	0.15	3.0	0.50	0.9	0.24	38
RA3.2	3.2	-0.075	0.64	1.0	0.22	4.0	0.65	0.9	0.32	35
RA4.0	4.0		0.74	1.2	0.25	5.0	0.95	1.0	0.47	32
RA5.0	5.0		0.74	1.2	0.90	7.0	1.15	1.0	0.60	28
RA6.0	6.0		0.74	1.2	1.10	8.0	1.35	1.1	0.70	25
RA7.0	7.0	-0.090	0.94	1.5	1.25	9.0	1.80	1.3	1.00	22
RA8.0	8.0		1.05	1.8	1.42	10.0	2.50	1.5	1.25	20
RA9.0	9.0		1.15	2.0	1.60	11.0	3.00	1.6	1.50	17
RA10.0	10.0		1.25	2.0	1.70	12.0	3.50	1.8	1.75	15
RA12.0	12.0	-0.110	1.35	2.5	3.10	15.0	4.70	1.9	2.30	13
RA15.0	15.0		1.55	3.0	7.00	20.0	7.80	2.2	3.30	11
RA19.0	19.0	-0.130	1.80	3.5	10.00	25.0	11.00	2.5	3.60	8
RA24.0	24.0		2.05	4.0	13.00	30.0	15.00	3.0	4.00	6