



SPRING-LOADED DEVICES

Plungers

Description:

Metric-Steel Standard Plungers offer metric thread sizes and large bearing surfaces that prevent binding and assure perfect alignment of the plunger at any extension.

Features/Benefits:

- Long travel
- Heavy & light end forces
- Black oxide finish

Typical Uses:

- Ejecting
- Position & secure
- Positive locking
- Tensioning
- Indexing
- Electrical contacts

PLEASE NOTE . . .

Spring-Loaded Devices are available in both steel and stainless steel.

Add suffix "S" to order stainless steel items.

Add +30% to price list for stainless steel.

SYSTEMES DE BLOCAJE

Plongeurs

Description:

Les plongeurs standard en acier offrent des dimensions de filetage métriques et de grandes surfaces d'appui qui empêchent le blocage et assurent un alignement parfait du plongeur quel que soit l'extension.

Caractéristiques/avantages:

- Course longue
- Forces axiales hautes et basses
- Fini à l'oxyde noir

Utilisations types:



- Ejection
- Positionnement & fixation
- Blocage positif
- Tension
- Indexage
- Contacts électriques

PRIERE DE NOTER...

Les systèmes de blocage existent en acier et en acier inoxydable.

Ajouter le suffixe "S" pour commander des pièces en acier inoxydable.

Ajouter +30% à la liste des prix pour l'acier inoxydable.

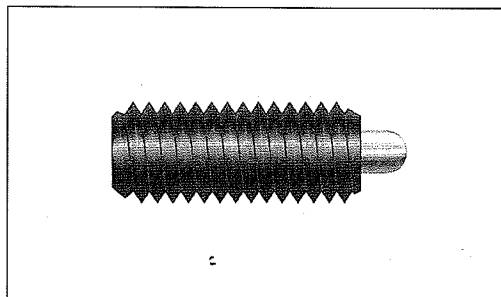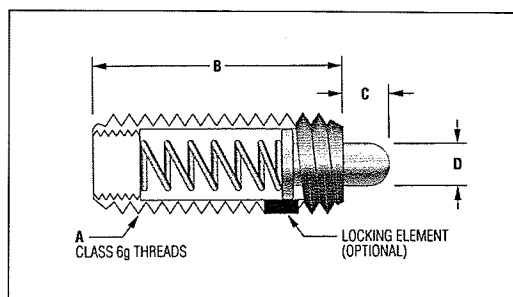

Heavy End Forces

Part No.	*Part No. Nylon lock	End Force N		A Class 6g Threads	B mm	C mm	D mm	Price Codes
		Initial	Final					
61002-01	62002-01	18	50	M6 x 1.0	20	2.5	2.7	AJ *AK
61002-02	62002-02	25	70	M8 x 1.25	22	3	3.5	AJ *AK
62002-03	62002-03	25	70	M10 x 1.5	22	3	4	AK *AL
61002-04	62002-04	45	110	M12 x 1.75	28	4	6	AK *AL

Light End Forces

Part No.	*Part No. Nylon Lock	End Force N		A Class 6g Threads	B mm	C mm	D mm	Price Code
		Initial	Final					
61003-01	62003-01	7	20	M6 x 1.0	20	2.5	2.7	AJ *AK
61003-02	62003-02	9	35	M8 x 1.25	22	3	3.5	AJ *AK
62003-03	62003-03	9	35	M10 x 1.5	22	3	4	AK *AL
61003-04	62003-04	10	55	M12 x 1.75	28	4	6	AK *AL

