

Specifications

- Load rating up to 90 kg per pair
- 100 % extension
- Slide height: 53.1 mm
- 19.1 mm slide thickness
- Side space for installation between the cabinet and the drawer: rail thickness 19.1 mm +0.2 mm to +0.5 mm
- Maximum slide length: 790 mm
- Temperature -20 °C to 70 °C
- Permitted mounting orientations: vertical mount
- Not suitable for flat mounting

Eigenschaften

- Lastwert bis 90 kg pro Paar
- 100 % Auszug
- Schienenhöhe: 53,1 mm
- Schienendicke: 19,1 mm
- Einbaubreite zwischen Korpus und Schub: Schienendicke 19,1 mm +0,2 mm bis +0,5 mm
- Maximale Schienenlänge: 790 mm
- Temperaturbereich -20 °C bis 70 °C
- Mögliche Montageweise: vertikal montiert
- Flachmontage nicht zulässig



Features

- Front disconnect


Funktionen

- Frontschnelltrennung



Technical Drawing

Technische Zeichnung

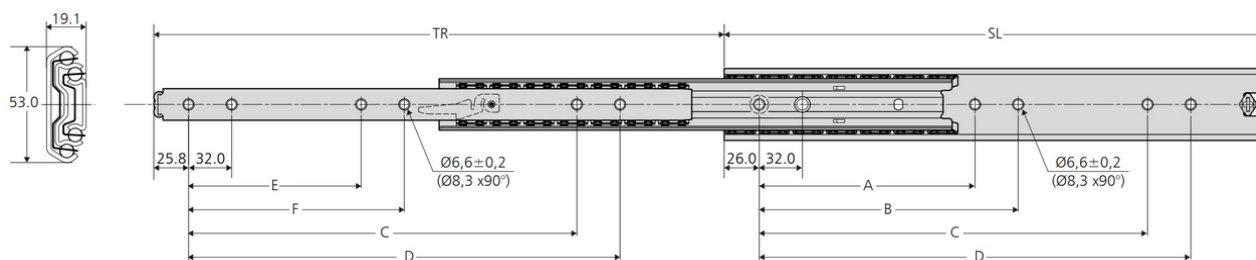

DZ5334	mm								kg	
	SL	TR	A	B	C	D	E	F	W	L1
DZ5334-0030	300	323	-	-	192	224	-	-	1.68	90
DZ5334-0035	350	373	-	-	224	256	-	-	1.977	90
DZ5334-0040	400	423	160	192	288	320	128	160	2.267	90
DZ5334-0045	450	473	192	224	352	384	160	192	2.569	90
DZ5334-0050	500	523	192	224	384	416	192	224	2.902	90
DZ5334-0055	550	573	256	288	448	480	224	256	3.173	90
DZ5334-0060	600	623	256	288	480	512	256	288	3.465	90
DZ5334-0070	700	723	288	320	576	608	288	320	4.03	90
DZ5334-0080	790	803	352	384	672	704	320	352	4.598	90

W: Weight per pair of slides

L1: 80,000 cycles, 450 mm wide drawer, vertical mount

W: Gewicht pro Schienenpaar

L1: 80.000 Zyklen, 450 mm breite Schublade, vertikal montiert

Additional Information

Weitere Informationen

Material and Surface

- Main Material: mild steel
- Ball Material: hardened steel
- Retainer Material: mild steel
- Finish: DZ - bright zinc finish - 12 h salt spray test

Material und Oberfläche

- Hauptmaterial: Unlegierter Stahl
- Kugelmateriale: Gehärteter Stahl
- Kugelhäfigmateriale: Unlegierter Stahl
- Oberflächenbeschichtung: DZ - Verzinkt, hell passiviert - 12 h Salzsprühnebeltest

Fixing

- M5 countersunk screw
- 6 mm countersunk euro screw

Befestigung

- M5-Senkkopfschraube
- 6 mm Senkkopf-Euroschraube

Notes

- The slide must be loaded centrally

Hinweise

- Die Schiene muss mittig belastet werden

Recommended Accessories

Empfohlenes Zubehör

DZ635xx		Platform Bracket Kit DZ635xx for Telescopic Slides	Plattformwinkelsatz DZ635xx für Teleskopschienen
DZ65490		Enclosure Bracket Kit DZ65490-4 for telescopic slides	Gehäuse- Montagewinkelsatz DZ65490-4 für Teleskopschienen