

RIVETTI STRUTTURALI ACCIAIO ZINC. / ACCIAIO ZINC. TESTA TONDA




STRUCTURAL BLIND RIVETS STEEL ZINC PLATED / STEEL ZINC PLATED DOME HEAD

- Elevata resistenza alle vibrazioni e buona tenuta ermetica
- High resistance to vibrations and good seal

D	L	T	K	F	Ø		CODICE	
+0,2/-0,15	+1/-0,2	max	max	max	foro/hole		code	
4,8	10	10,2	2,3	18,3	5,1 - 5,2		01MFX4810TT	4440 N
	14			25,5			01MFX4814TT	5780 N
6,4	14	13,5	3,0	30,0	6,7 - 7,0		01MFX6414TT	8220 N
	20			36,2			01MFX6420TT	11000 N
7,8	21	16,4	3,8	39,0	8,1 - 8,3		01MFX7821TT	8300 N
9,5	21	20	4,5	42,0	9,96 - 10,36		01MFX9521TT	13700 N
								8460 N



MFX - TT

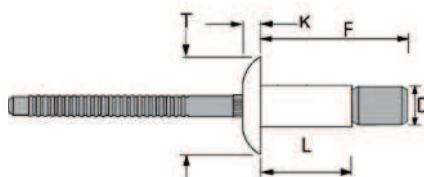

- DA UTILIZZARE CON UGELLO STANDARD
- TO BE USED WITH STANDARD NOSE PIECE



RIVETTI STRUTTURALI ACCIAIO ZINC. / ACCIAIO ZINC. TESTA SVASATA


STRUCTURAL BLIND RIVETS STEEL ZINC PLATED / STEEL ZINC PLATED COUNTERSUNK HEAD

- Elevata resistenza alle vibrazioni e buona tenuta ermetica
- High resistance to vibrations and good seal

D	L	T	K	F	Ø		CODICE	
					foro/hole		code	
4,8	13	8,5	2,2	20,0	5,1 - 5,2		01MFX4813TS	4100 N
	16			26,2			01MFX4816TS	5780 N
6,4	17	10,2	2,4	27,0	6,7 - 7,0		01MFX6417TS	8240 N
	22			33,0			01MFX6422TS	10690 N



MFX - TS

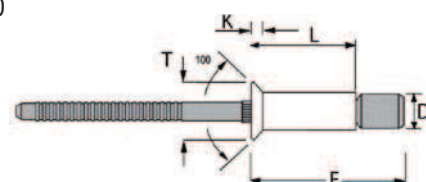

- DA UTILIZZARE CON UGELLO STANDARD
- TO BE USED WITH STANDARD NOSE PIECE

