




Aluminium [AlMg2,5 $\varnothing$ 2,4-3,2]
Polished [AlMg3,5 $\varnothing$ 4,0-6,4]



Steel
Zinc plated

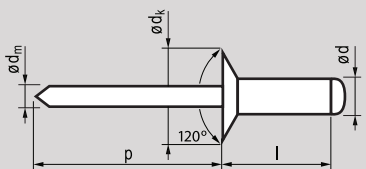

open type I countersunk head

$\varnothing d$	l [+1/-0,2]		Item nr.	$\varnothing d_k$	k	$\varnothing d_m$	p		
[mm]	[mm]	[mm]		[mm]	[mm]	[mm]	[mm]	[N]	[N]
2,4	6,0	2,0-4,0	10342406	5,0 [+0/-0,4]	-	~1,45	≥ 27	355	315
[+0,08/-0,10]	8,0	4,0-6,0	2408						
 $\varnothing 2,5$	10,0	6,0-8,0	2410						
3,0	6,0	1,5-3,5	10343006	6,0 [+0/-0,4]	-	~1,75	≥ 27	810	620
[+0,08/-0,10]	8,0	3,5-5,5	3008						
 $\varnothing 3,1$	10,0	5,5-7,5	3010						
 $\varnothing 3,3$	12,0	7,5-9,5	3012						
3,2	6,0	1,5-3,5	10343206	6,0 [+0/-0,4]	-	~1,75	≥ 27	980	760
[+0,08/-0,10]	8,0	3,5-5,5	3208						
	10,0	5,5-7,5	3210						
$\varnothing 3,3$	12,0	7,5-9,5	3212						
	14,0	9,5-11,5	3214						
4,0	6,0	1,5-3,0	10344006	7,5 [+0/-0,5]	-	~2,10	≥ 27	1.600	1.200
[+0,08/-0,15]	8,0	3,0-5,0	4008						
	10,0	5,0-6,5	4010						
$\varnothing 4,1$	12,0	6,5-8,6	4012						
	14,0	8,5-10,5	4014						
	16,0	10,5-12,5	4016						
4,8	8,0	3,0-4,5	10344808	9,0 [+0/-0,5]	-	~2,70	≥ 27	2.230	1.690
[+0,08/-0,15]	10,0	4,5-6,0	4810						
	12,0	6,0-8,0	4812						
$\varnothing 4,9$	14,0	8,0-10,0	4814						
	16,0	10,0-12,0	4816						
	18,0	12,0-14,0	4818						
	20,0	14,0-16,0	4820						
	25,0	18,0-21,0	4825						
5,0	8,0	3,0-4,5	10345008	9,0 [+0/-0,5]	-	~2,70	≥ 27	2.500	2.000
[+0,08/-0,15]	10,0	4,5-6,0	5010						
	12,0	6,0-8,0	5012						
$\varnothing 5,1$	14,0	8,0-10,0	5014						
	16,0	10,0-12,0	5016						
	18,0	12,0-14,0	5018						
	21,0	14,0-17,0	5020						
	25,0	17,0-20,0	5025						