

PART NO.	HOLE DIA. "G"	THICKNESS "F"	"A"	"B"	"C"	"D"	"E"	FIG NO.
SRT-3035	.122-.126 (3.1-3.2)	.039-.079 (1.0-2.0)	.394 (10.0)	.315 (8.0)	.14 (3.5)	.118 (3.0)	.26 (6.6)	1
SRT-3045		.079-.118 (2.0-3.0)			.18 (4.5)			
SRT-3055		.118-.157 (3.0-4.0)			.22 (5.5)			
SRT-3065		.157-.197 (4.0-5.0)			.26 (6.5)			
SRT-3075		.197-.236 (5.0-6.0)			.30 (7.5)			
SRT-3080		.217-.256 (5.5-6.5)			.32 (8.0)			
SRT-3535	.142-.146 (3.6-3.7)	.039-.079 (1.0-2.0)	.472 (12.0)		.14 (3.5)	.139 (3.5)	.26 (6.6)	2
SRT-3545		.079-.118 (2.0-3.0)			.18 (4.5)			
SRT-3555		.118-.146 (3.0-3.7)			.22 (5.5)			
SRT-3570		.150-.205 (3.8-5.2)			.28 (7.0)			
SRT-3580		.209-.256 (5.3-6.5)			.32 (8.0)			
SRT-4050	.161-.165 (4.1-4.2)	.098-.138 (2.5-3.5)			.20 (5.0)	.157 (4.0)	.30 (7.6)	
SRT-4060		.138-.177 (3.5-4.5)		.24 (6.0)				
SRT-4070		.177-.216 (4.5-5.5)		.28 (7.0)				
SRT-4080		.216-.256 (5.5-6.5)		.32 (8.0)				
SRT-4090		.256-.295 (6.5-7.5)		.35 (9.0)				
SRT-4100		.295-.335 (7.5-8.5)		.39 (10.0)	.44 (11.2)			

NOTES:

1. MATERIAL: NYLON 6, (RMS-52).
2. COLOR: BLACK.
3. V-0 NYLON, RMS-103, AVAILABLE BY SPECIAL ORDER. TO ORDER REPLACE "SRT" WITH "SRTVO"




FIG. 1





FIG. 2

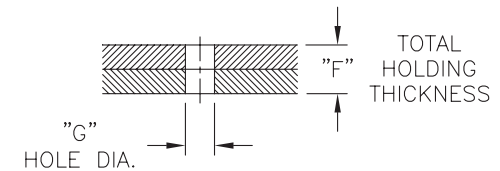

G	SEE ECN #1149 FOR CHANGES	SJ 04.03.06	TITLE: SNAP RIVET, T TYPE					DWG IN IN (MM)	
F	SEE ECN #992 FOR CHANGES	SK 05.03.05							
E	REM. RMS COL., ADDED RMS-52 & RMS 103	RG 10.24.01	TOLERANCES UNLESS NOTED .XX=±.010 .XXX=±.005 FRAC=±1/64 ANG=±1°	FILE #	SRT	DWN: P.B.	APP:	FINAL	
D	CHANGED FILE NUMBER	SM 05.18.01		MAT'L: SEE NOTES		DT: 04-05-94	DT:	PART #	
C	ADDED P/N: SRT-3075	SM 02.01.01		RE: RICHCO, INC.		RICHCO INC. PO BOX 804238, CHICAGO, 60680 (773) 539-4060		SRT-SERIES	
B	ADDED P/N: SRT-3535, SRT-3580, SRT-4090	S.M.11.08.00							
A	QUOTATION MARKS REMOVED	P.B.01.19.95.							
REV	DESCRIPTION	ENGR DATE					PRINT TYPE CA		

TOLERANCES
UNLESS NOTED
.XX=±.010
.XXX=±.005
FRAC=±1/64
ANG=±1°

FILE # SRT
MAT'L: SEE NOTES
RE: RICHCO, INC.

DWN: P.B.
DT: 04-05-94
APP:
DT:
RICHCO INC.
PO BOX 804238, CHICAGO, 60680
(773) 539-4060



DWG IN
IN (MM)

