
NOTES:


- A. MATERIAL AND FINISH:
 HOUSING: DIE CAST ZINC, CHROME PLATED
 LOCK PLUG BODY: DIE CAST ZINC, ORGANIC COATING (IF ASSEMBLY
 INCLUDES SCALP) OR CHROME PLATED
 LOCK WAFERS AND SPRINGS: STAINLESS STEEL OR BRASS, NATURAL
 PAWL AND ACTUATOR: DIE CAST ZINC, ORGANIC COATING
 KEYS: NICKEL PLATED BRASS
- B. HOUSING COSMETIC SPECIFICATION:
 TOP SURFACE OF HOUSING IS TO BE A CLASS "A" SURFACE,
 AND ALL OTHER SURFACES ARE TO BE CLASS "C" PER SOUTHCO COSMETIC SPECIFICATION S-121-01 FOR CHROME PLATING.
- C. PK-50-01-01 IS PROVIDED WITH NO LOCK PLUG. LOCK PLUG IS ORDERED SEPARATELY.
- D. KEY CODES LS001 LS125 USE MASTER KEY,

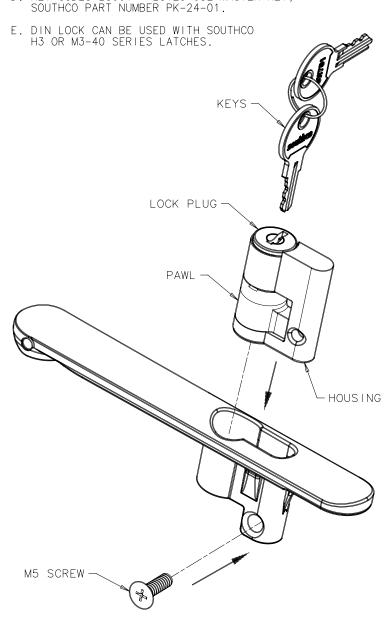


INSTALLATION SCALE 3:4

INSTALLATION INSTRUCTIONS:

- 1. ALIGN LOCK ASSEMBLY WITH SLOT IN MATING PART AS SHOWN.
- 2. PUSH LOCK ASSEMBLY INTO MATING PART UNTIL MOUNTING HOLES ALIGN.
- 3. SECURE LOCK ASSEMBLY INTO MATING PART USING A M5 FLATHEAD SCREW.

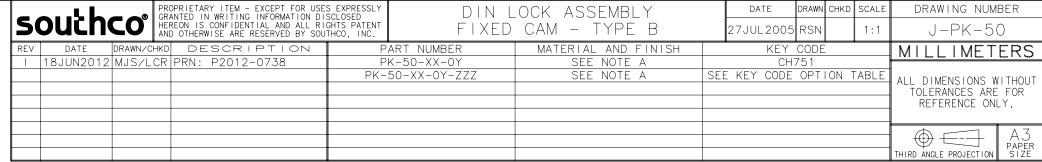

KEY CODE OPTIONS:

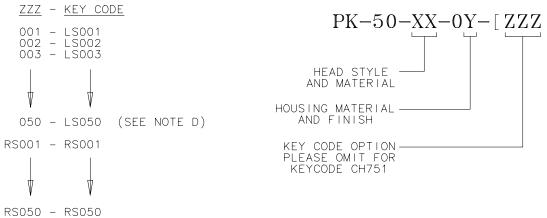



KD1050 - KEYED DIFFERENTLY, 50 DIFFERENT KEY CODES, RS001 - RS050, SOLD IN BAGS OF 50.


KD1125 - KEYED DIFFERENTLY, 125 DIFFERENT KEY CODES, RS001 - RS125, SOLD IN BAGS OF 125.


MK1010 - MASTER KEYED, KEYED DIFFERENTLY, 10 DIFFERENT KEY CODES, LS001 - LS010, SOLD IN BAGS OF 10.


MK1050 - MASTER KEYED, KEYED DIFFERENTLY, 50 DIFFERENT KEY CODES, LS001 - LS050, SOLD IN BAGS OF 50.


MK1125 - MASTER KEYED, KEYED DIFFERENTLY, 125 DIFFERENT KEY CODES, LS001 - LS125, SOLD IN BAGS OF 125.


PART NUMBER:














ASSEMBLED (SHOWN IN LOCKED POSITION)

$\phi 17.2^{+0.1}_{0}$ 33.4 + 0.1 2X R0.3±0.1 HOLE PREPARATION

HEAD STYLE OPTIONS:

XX - HEAD STYLE

01 - NO LOCK PLUG

02 - KEY LOCKING, DIE CAST ZINC, CHROME PLATÉD, NO SHUTTER

05 - KEY LOCKING, DIE CAST ZINC, STAINLESS STEEL SCALP, DROP SHUTTER

10 - KEY LOCKING, DIE CAST ZINC, STAINLESS STEEL SCALP, SLIDE SHUTTER

HOUSING OPTIONS:

Y - HOUSING MATERIAL AND FINISH:

1 - DIE CAST ZINC, CHROME PLATED